

elsner

PRICE LIST

Retail prices exclusive VAT

as of 03.04.2025

CONTROL SYSTEMS FOR BUILDINGS, CONSERVATORIES AND PATIO ROOFS

Comparison and Overview Table
Control Units 5

CENTRAL CONTROL UNITS

WS1000 Connect 6
WS1000 Style 6
WS1 Style 7
WS1000 Color 8
WS1 Color 8
Solexa II 9
Solexa 230 V 9
Arexa 230 V 10
Cable Set

RADIO REMOTE CONTROLS, RADIO PUSH BUTTONS

Remo pro 10
Remo 8 10
RF-B2-UP Radio Push Button Interface 11

RADIO CONTROL UNITS, F-CON

RF-MSG-ST 11
Connection lines 11
Mains line 11
RF-Router 12
RF-Antenna 12

RADIO SENSORS

WGT 12
WGTH gl 12
WGTH-UP 12

WEATHER SENSORS FOR CONTROL UNITS

P04i-GPS 13
P03i-GPS 13
P03/3 Replacement Weather Station 13

ACCESSORIES CONTROLS

Adapter Plugs WS1000 Color/Style 13
Surface-mounted housing WS1 Color, Style ... 13
Surface Mount Housing Indoor Sensors ... 14
Charging Set Solexa II-Display/Remo pro ... 14
Adapter plates WS1000 Color/WS1 Color/
WS1000 Connect 14

SIMPLY AT HOME

IRRIGATION

Jardana 16
TMi 16

AIR QUALITY

Air Vision 16

SMART HOME EXTENSION

KNX Matter Server 16



CONVENTIONAL BUILDING TECHNOLOGY, INSTALLATION TECHNOLOGY

SENSOR WITH SWITCHING OUTPUT

RW-PF 18

CONVERTER

GPS-DCF-Converter 18

GROUP CONTROL RELAY

GS-2DST 18

POWER SUPPLY UNITS

24 V DC network devices 19

MODBUS & RS485

MODBUS-SENSORS

eTR 101 Modbus 21
Sewi Modbus 21
P03/3-Modbus 21
TH-AP Modbus 21

RS485-SENSORS

Suntracer RS485 pro Weather Station 22
P04/3-RS485 Weather Stations 22
P03/3-RS485 Weather stations 22

KNX

GLASS BUTTON

Nunio KNX M-T	24
---------------------	----

SERIES eTR

KNX eTR 101, KNX eTR 101-BA2	24
KNX eTR 102 FC	25
KNX eTR 201/202 Sunblind.....	25
KNX eTR 205/206, KNX eTR 208	26
KNX eTR M Push Buttons.....	27
KNX eTR gl	27

ROOM CONTROLLERS & SENSORS

For Frames 55 mm

Cala Touch KNX.....	28
KNX AQS/TH-UP Touch & gl	28
KNX VOC/TH-UP Touch	29
KNX TH-UP Touch, KNX TH-UP gl.....	29
KNX T-L-Pr-UP Touch	29
KNX T-UP Touch, KNX T-UP gl.....	30
Cala KNX T 101/201/202	30
KNX T-UP	31
KNX T-Objekt-UP	31
Cala KNX MultiTouch T	31
Cala KNX M-T Push Buttons	32
Cala KNX IL	32

For Swiss System

Cala Touch KNX CH	33
KNX AQS/TH-UP Touch & gl CH	34
KNX VOC/TH-UP Touch CH	34
KNX TH-UP Touch CH, KNX TH-UP gl CH....	35
KNX T-L-Pr-UP Touch CH.....	35
Cala KNX T 101/201/202 CH	36
KNX T-UP Touch CH, KNX T-UP gl CH.....	35
Cala KNX MultiTouch T CH.....	36
Cala KNX M-T CH Push Buttons.....	37
Cala KNX IL CH	37

ROOM CONTROLLERS, CONTROLS

Comparison and Overview Table	
KNX Devices with Touch Display	38
CasaConnect KNX Building Control.....	39
Fabro KNX	39
Corlo Touch KNX 5in.....	39

INDOOR SENSORS

Sewi KNX.....	40
Intra-Sewi KNX, Mini-Sewi KNX.....	41
KNX B8-TH Interface.....	42
<i>T-NTC-ST, TH-UP basic</i>	
KNX T-UN	42
KNX T6-UN-B4.....	42
<i>T-100, T-130</i>	
Salva KNX.....	43
Leak KNX, Leak KNX basic.....	43

WEATHER & OUTDOOR SENSORS

Comparison and Overview Table	
KNX Weather Stations.....	44
Suntracer KNX pro.....	46
Suntracer KNX sl.....	46
P04-KNX-GPS	47
sl-Weather sensors	47
Suntracer KNX-GPS	47
Weather sensors.....	48
Windancer KNX.....	48
BX8 KNX	49
Comparison and Overview Table	
KNX Outdoor Sensors.....	49
Vari KNX	50
KNX PY.....	50
KNX T-AP, KNX TH65-AP	50
KNX I4-ERD, TH-ERD	51
KNX SO250	51

ACTUATORS

Actuators for lighting (DALI)

KNX DALI L1 & L2 ind/gr/bc.....	52
KNX DALI L1 & L2 ind/gr/bc sec	52

Actuators for Doors/Gates

KNX A3-B2.....	52
----------------	----

Switching Actuators

KNX R1-B4 compact.....	53
------------------------	----

Actuators for drives or consumers

KNX S1R-B4 compact.....	53
KNX S4-B10, KNX S2-B6	53

Comparison and Overview Table

Actuators for Drives/Multifunctional.....	54
---	----

Actuators for 24 V DC drives

KNX S4-B12 24 V	55
-----------------------	----

Actuators for drives with 3 limit switches

KNX S4-B12 DES	55
----------------------	----

POWER SUPPLY UNITS

KNX PS 640.....	55
KNX KNX PS 640+	55
KNX PS640 4U.....	56
KNX PS640-IP 2U.....	56

INTERFACES, COUPLERS

KNX B4 Universal.....	56
KNX CP TP	56
KNX CP IP	57

KNX RF

KNX RF-MSG-ST	57
Remo KNX RF.....	57

KNX TRAINING ACCESSORIES

KNX Training Kit "Basic"	58
--------------------------------	----

ACCESSORIES

SENSORS INPUTS

T-NTC	60
T-KTY82	60

INSTALLATION ACCESSORIES







eTR Surface Mount Housing	60
ST Power Plug Connector Set	60

FOR MOUNTING OF WEATHER STATIONS


Worm Drive Hose Clips	60
Stainless steel mounting strap	60
Mounts for Weather Stations	61

CONTROL
SYSTEMS FOR
BUILDINGS,
CONSERVATORIES
AND PATIO ROOFS

CONTROL UNITS FOR BUILDINGS, CONSERVATORIES & PATIO ROOFS

						
NAME	WS1000 CONNECT	WS1000 STYLE (COLOR)	WS1 STYLE (COLOR)	SOLEXA II	SOLEXA	AREXA
Item number	60241-60244, 60246	Style: 60201-60204, 60206-60209, 60214 Color: 60121-60128	Style: 60180-60189, 60194 Color: 60135-60142, 60145, 60146	10144, 10150	10110, 10130-10131	10115
Product info on ...	Page 6	Page 6 & 8	Page 7 & 8	Page 9	Page 9	Page 10
Type	Central Unit	Central Unit	Central Unit	Radio control system	Shading control	Window control
Wired Outputs	4-10x Drive, 4x Multifunction	4-10x Drive, 4x Multifunction	0-4x Drive, 2x Multifunction	1x Drive	1x Drive	1x Drive
Wired Inputs	4x Multifunction 10x wall push buttons	4x Multifunction 10x wall push buttons	2x Multifunction 4x wall push buttons	–	–	–
Radio Outputs	32 input/output channels for remote control, push buttons, sensors & actuators	32 input/output channels for remote control, push buttons, sensors & actuators	32 input/output channels for remote control, push buttons, sensors & actuators	16x radio actuator	–	–
Radio Inputs	32 input/output channels for remote control, push buttons, sensors & actuators	32 input/output channels for remote control, push buttons, sensors & actuators	32 input/output channels for remote control, push buttons, sensors & actuators	32 (Remote control, push buttons, sensors)	Remote control	Remote control
Room sensors inclusively	Outdoor sensor for temperature, air humidity	Outdoor sensor for temperature, air humidity	Indoor sensor for temperature, humidity	Indoor sensor for temperature	Indoor sensor for temperature	Indoor sensor for temperature
Room sensors optional	Outdoor sensor for temperature, air humidity (& CO ₂)	Outdoor sensor for temperature, air humidity (& CO ₂)	Outdoor sensor for temperature, air humidity (& CO ₂)	Outdoor sensor for temperature, air humidity (& CO ₂)	–	–
Weather sensors inclusively	temperature, brightness, wind velocity, precipitation	temperature, brightness, wind velocity, precipitation	temperature, brightness, wind velocity, precipitation	temperature, brightness, wind velocity, precipitation	temperature, brightness, wind velocity, precipitation	temperature, brightness, wind velocity, precipitation
Interfaces	LAN/WLAN (integrated)	–	–	WLAN for app usage (optional)	–	–
Control for:						
Window	✓	✓	✓	✓	–	✓
Awning	✓	✓	✓	✓	✓	–
Blind	✓	✓	✓	✓	✓	–
Shutter	✓	✓	✓	✓	✓	–
Heating	✓	✓	✓	✓	–	–
Cooling	✓	✓	✓	–	–	–
Alarm signal	✓	✓	✓	–	–	–
Ventilation devices	✓	✓	✓	–	–	–
Gutter heating	✓	✓	✓	✓	–	–
Light	✓	✓	✓	✓	–	–
Motion detector	✓	✓	✓	–	–	–
Smoke detector	✓	✓	✓	–	–	–
SD Card	✓	✓	✓ (only WS1 Style)	–	–	–
Calculation of the position of the sun	✓	✓	✓	–	–	–

CENTRAL CONTROL UNITS

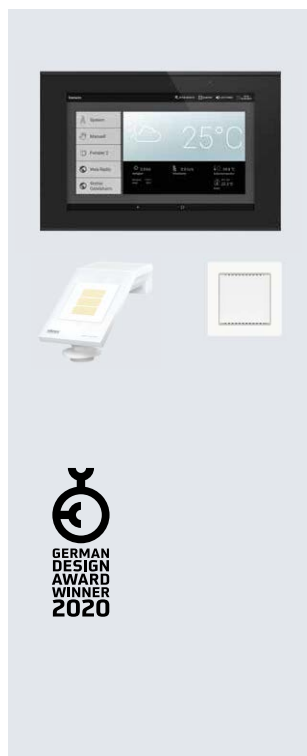

WS1000® Connect Building/Conservatory Controls

- Complete system comprising central unit, weather station and indoor sensor

Central unit:

- Available for 4, 6, 8 or 10 drive outputs (for awning, blind, shutter, window, sliding door). Drive outputs 230 V or potential-free (PF version)
- 4 multifunctional outputs (for heating, cooling, ventilation, alarm, light, gutter heating)
- 4 multifunctional inputs (for motion or smoke detector, door contact, binary contact, switch signal of a heating / cooling system a camera or for reset)
- 10 connections for external push buttons
- 32 radio channels (for Elsner RF remote control, RF push buttons, RF actuators, RF sensors), Radio frequency 868.2 MHz, Elsner RF
- SD card slot for images (slideshow) and backup of settings
- Network connection (LAN or WLAN, including Internet connection) for surfing, use of the WS1000 Connect App on mobile devices, remote diagnostics
- Integrated speakers (4 tweeters, 1 full-range loudspeaker)

- Colour touch display 10.1 inches, real glass surface. Housing plastic
- Flush- / cavity wall mounting
- Approx. 279 × 185 (W × H, mm), mounting depth approx. 29 mm, concealed box approx. 254 × 171 × 85 (W × H × D, mm)
- Colour black glossy
- Supply: 230 V AC, 50 Hz

Weather station P04i-GPS:

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)
- Colour white

Indoor sensor WGTH gl:

- For temperature and air humidity
- Wall mounting in a socket. Frame included
- Glass surface, colour pure white RAL 9010

Optional accessories:

Radio remote controls	p. 10
Radio control modules	p. 11
Radio sensors	p. 12
Weather sensors	p. 13

N° 60241	WS1000 Connect-4 , 4 drive outputs	X1	2,719.33 €
N° 60242	WS1000 Connect-6 , 6 drive outputs	X1	2,960.50 €
N° 60243	WS1000 Connect-8 , 8 drive outputs	X1	3,201.68 €
N° 60244	WS1000 Connect-10 , 10 drive outputs	X1	3,443.70 €
N° 60246	WS1000 Connect-10 PF , 10 potential-free drive outputs	Discontinued item X1	3,443.70 €



WS1000® Style Building/Conservatory Controls

- Complete system comprising central unit, weather station and indoor sensor WGTH-UP
- Available in 2 colours: „white“ (central unit white / grey, indoor sensor white glossy), „black“ (central unit dark grey / black, indoor sensor aluminium matt). Weather station always white.

Central unit:

- Available for 4, 6, 8 or 10 drive outputs (for awning, blind, shutter, window, sliding door). Drive outputs 230 V or potential-free (PF version)
- 4 multifunctional outputs (for heating, cooling, ventilation, alarm, light, gutter heating)
- 4 multifunctional inputs (for motion or smoke detector, door contact, binary contact, switch signal of a heating / cooling system a camera or for reset)
- 10 connections for external push buttons
- 32 radio channels (for Elsner RF remote control, RF push buttons, RF actuators, RF sensors), Radio frequency 868.2 MHz, Elsner RF

- SD card slot for images (slideshow) and backup of settings
- Colour touch display 8.4 inches, real glass surface
- Flush-/cavity wall mounting
- Approx. 270 × 185 (W × H, mm), mounting depth approx. 9 mm, concealed box approx. 254 × 171 × 85 (W × H × D, mm)
- Supply: 230 V AC

Weather station P04i-GPS:

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)

Indoor sensor WGTH-UP:

- For temperature and air humidity
- Installation in a socket. Frame included

WS1000 Style continued on next page

Continued from WS1000 Style

Optional accessories:

Radio remote controls	p. 10
Radio control modules	p. 11
Radio sensors	p. 12
RF-Antenna	p. 12
Weather sensors	p. 13
Adapter plugs	p. 13

N° 60201	WS1000 Style-4 white, 4 drive outputs		X1	2,162.27 €
N° 60202	WS1000 Style-6 white, 6 drive outputs		X1	2,572.35 €
N° 60203	WS1000 Style-8 white, 8 drive outputs		X1	2,982.44 €
N° 60204	WS1000 Style-10 white, 10 drive outputs		X1	3,392.52 €
N° 60206	WS1000 Style-4 black, 4 drive outputs		X1	2,162.27 €
N° 60207	WS1000 Style-6 black, 6 drive outputs		X1	2,572.35 €
N° 60208	WS1000 Style-8 black, 8 drive outputs		X1	2,982.44 €
N° 60209	WS1000 Style-10 black, 10 drive outputs		X1	3,392.52 €
N° 60214	WS1000 Style-10 PF white, 10 potential-free drive outputs	Discontinued item	X1	3,392.52 €

WS1® Style Building/Conservatory Controls

- Complete system comprising central unit (with integrated sensor for temperature and humidity) and weather station
- Available in 2 colours: „white“ (white / grey), „black“ (dark grey / black).
Weather station always white

Central unit:

- Available with 1, 2, 3 or 4 drive outputs (for awning, blind, shutter, window, sliding door) or without drive outputs. Drive outputs 230 V or potential-free (PF version)
- 2 multifunctional outputs (for heating, cooling, ventilation, alarm, light, gutter heating)
- 2 multifunctional inputs (for motion or smoke detector, door contact, binary contact, switch signal of a heating/cooling system, a camera or for reset)
- 4 connections for external push buttons
- 32 radio channels (for Elsner RF remote control, RF push buttons, RF actuators, RF sensors), Radio frequency 868.2 MHz, Elsner RF

- SD card slot for images (slideshow) and backup of settings
- Colour touch display 5.7 inches, real glass surface
- Flush- / cavity wall mounting (housing for surface mounting available separately)
- Approx. 181 × 131 (W × H mm), mounting depth approx. 8 mm, concealed box approx. 172 × 122 × 81 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

Weather station P04i-GPS:

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)

N° 60180	WS1 Style-0 white, without drive outputs		X1	1,132.77 €
N° 60181	WS1 Style-1 white, 1 drive output		X1	1,237.73 €
N° 60182	WS1 Style-2 white, 2 drive outputs		X1	1,419.24 €
N° 60183	WS1 Style-3 white, 3 drive outputs		X1	1,600.76 €
N° 60184	WS1 Style-4 white, 4 drive outputs		X1	1,782.27 €
N° 60185	WS1 Style-0 black, without drive outputs		X1	1,132.77 €
N° 60186	WS1 Style-1 black, 1 drive output		X1	1,237.73 €
N° 60187	WS1 Style-2 black, 2 drive outputs		X1	1,419.24 €
N° 60188	WS1 Style-3 black, 3 drive outputs		X1	1,600.76 €
N° 60189	WS1 Style-4 black, 4 drive outputs		X1	1,782.27 €
N° 60194	WS1 Style-4 PF white, 4 potential-free drive outputs	Discontinued item	X1	1,782.27 €

Optional accessories:

Radio remote controls	p. 10
Radio control modules	p. 11
Radio sensors	p. 12
RF-Antenna	p. 12
Weather sensors	p. 13
Surface-mounted housing, N° 60157	p. 13

**Optional accessories:**

Radio remote controls	p. 10
Radio control modules	p. 11
Radio sensors	p. 12
RF-Antenna	p. 12
Weather sensors	p. 13
Adapter plugs	p. 13

WS1000® Color Building/Conservatory Controls

- Complete system comprising central unit, weather station and WGTH-UP indoor sensor
- Available in 2 colours: „white“ (central unit white / grey glossy, WGTH-UP white glossy), „alu“ (central unit white aluminium / graphite glossy, WGTH-UP aluminium matt). Weather station always white.

Central unit:

- Available for 4, 6, 8 or 10 drive outputs (for awning, blind, shutter, window, sliding door). Drive outputs 230 V
- 4 multifunctional outputs (for heating, cooling, ventilation, alarm, light, gutter heating)
4 multifunctional inputs (for motion or smoke detector, door contact, binary contact, switch signal of a heating/cooling system a camera or for reset)
- 10 connections for external push buttons.
- 32 radio channels (for Elsner RF remote control, RF push buttons, RF actuators, RF sensors), Radio frequency 868.2 MHz, Elsner RF

- SD card slot for images (slideshow) and backup of settings
- Colour touch display 8.4 inches
- Flush-/cavity wall mounting
- Housing plastic, partly painted
- Approx. 250 × 182 × 43, concealed box approx. 235 × 169 × 62 (W × H × D, mm), 50 Hz
- Supply: 230 V AC

Weather station P04i-GPS:

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)

Indoor sensor WGTH-UP:

- For temperature and air humidity
- Installation in a socket. Frame included

N° 60121	WS1000 Color-4 white, 4 drive outputs	X1	1,926.89 €
N° 60122	WS1000 Color-6 white, 6 drive outputs	X1	2,366.39 €
N° 60123	WS1000 Color-8 white, 8 drive outputs	X1	2,805.88 €
N° 60124	WS1000 Color-10 white, 10 drive outputs	X1	3,245.38 €
N° 60125	WS1000 Color-4 alu, 4 drive outputs	X1	1,926.89 €
N° 60126	WS1000 Color-6 alu, 6 drive outputs	X1	2,366.39 €
N° 60127	WS1000 Color-8 alu, 8 drive outputs	X1	2,805.88 €
N° 60128	WS1000 Color-10 alu, 10 drive outputs	X1	3,245.38 €

**WS1® Color Building/Conservatory Controls**

- Complete system comprising central unit (with integrated sensor for temperature and humidity) and weather station
- Available in 2 colours: „white“ (white / grey glossy), „alu“ (white aluminium / graphite glossy). Weather station always white

Central unit:

- Available with 1, 2, 3 or 4 drive outputs (for awning, blind, shutter, window, sliding door) or without drive outputs. Drive outputs 230 V.
- 2 multifunctional outputs (for heating, cooling, ventilation, alarm, light, gutter heating)
- 2 multifunctional inputs (for motion or smoke detector, door contact, binary contact, switch signal of a heating/cooling system a camera or for reset)
- 4 connections for external push buttons

- 32 radio channels (for Elsner RF remote control, RF push buttons, RF actuators, RF sensors), Radio frequency 868.2 MHz, Elsner RF
- Colour touch display 5.7 inches
- Flush-/cavity wall mounting (housing for surface mounting available separately)
- Housing plastic, partly painted
- Approx. 164 × 121 × 29, concealed box approx. 152 × 92 × 62 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

Weather station P04i-GPS:

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)

WS1 Color continued on next page

Continued from WS1 Color

Optional accessories:

Radio remote controls	p. 10
Radio control modules	p. 11
Radio sensors	p. 12
RF-Antenna	p. 12
Weather sensors	p. 13
Surface-mounted housing, N° 60157	p. 13

N° 60145	WS1 Color-0 white, without drive outputs	X1	861.18 €
N° 60135	WS1 Color-1 white, 1 drive output	X1	976.30 €
N° 60136	WS1 Color-2 white, 2 drive outputs	X1	1,196.47 €
N° 60137	WS1 Color-3 white, 3 drive outputs	X1	1,416.64 €
N° 60138	WS1 Color-4 white, 4 drive outputs	X1	1,636.81 €
N° 60146	WS1 Color-0 alu, without drive outputs	X1	861.18 €
N° 60139	WS1 Color-1 alu, 1 drive output	X1	976.30 €
N° 60140	WS1 Color-2 alu, 2 drive outputs	X1	1,196.47 €
N° 60141	WS1 Color-3 alu, 3 drive outputs	X1	1,416.64 €
N° 60142	WS1 Color-4 alu, 4 drive outputs	X1	1,636.81 €

Solexa® II Radio Control System

- System for control of shadings (awnings, blinds, shutters), windows, lights, heaters
- Modular structure for maximum flexibility
- Display and weather station as set, additional displays available
- 1 wired connection to the weather station, 16 radio outputs for Elsner RF radio actuators
- 32 radio inputs for Elsner RF operating devices / sensors, e.g. remote control, external temperature measurement
- Radio frequency 868.2 MHz, Elsner UF

Touch display:

- Radio control panel with Touch Display
- Integrated room temperature sensor
- For combination with weather station

- Housing for surface mounting, approx. 107 × 112 × 14 (W × H × D, mm)
- Integrated battery, charging via USB-2.0-Micro-B-cable

Weather station:

- Collection of temperature, precipitation, wind speed, brightness (1 sun sensor)
- GPS receiver
- Connection for 230 V motor (integrated motor control unit)
- For combination with Solexa II displays (up to 4 pieces)
- For wall / pole mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 230 V AC

N° 10150	Solexa II-Set (1 weather station and 1 display)	X1	614.29 €
N° 10144	Solexa II-Display	X1	315.13 €

Solexa 230 V Shading Control

- Complete system for control of an awning (resp. a group of awnings) or blind (resp. a group of blinds)
- Display and Weather station as a set

Display:

- Radio control panel with integrated temperature sensor
- Housing for surface mounting, approx. 103 × 98 × 28 (W × H × D, mm), housing plastic, available in 3 colours
- Supply: 2 × batteries / storage batteries AA

Weather station:

- Collection of temperature, precipitation, wind speed, brightness (1 sun sensor)
- Connection to 230 V-Motor (integrated motor control unit)
- For wall / pole mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

N° 10110	Solexa 230 V white matt (similar to RAL 9016)	X1	380.67 €
N° 10130	Solexa 230 V aluminium matt brush finished	X1	411.68 €
N° 10131	Solexa 230 V pearl dark grey matt brush finished	X1	411.68 €

Optional accessories:

Radio remote controls	p. 10
Connection cable set	p. 10

**Optional accessories:**

Radio remote controls	p. 10
Connection cable set	p. 10

Arexa® 230 V Windows Control

- Complete system for control of a window (resp. a group of windows)
- Display and Weather station as a set

Display:

- Radio control panel with integrated temperature sensor
- Housing for surface mounting, approx. 103 × 98 × 28 (W × H × D, mm), housing plastic white
- Supply: 2 × batteries/storage batteries AA

Weather station:

- Collection of temperature, precipitation, wind speed, brightness (1 sun sensor)
- Connection to 230 V-Motor (integrated motor control unit)
- For wall / pole mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

N° 10115	Arexa 230 V white matt (similar to RAL 9016)	X1	380.67 €
----------	---	----	-----------------

**Connection Cable Set for Solexa® or Arexa®**

- For simplified connection of the controls via a mains socket
- Mains cable with shock-proof plug and cable for drive connection with STAK 3 connector (approx. 6 m)

N° 10113	Cable Set for Solexa/Arexa	X1	85.88 €
----------	-----------------------------------	----	----------------

RADIO REMOTE CONTROLS, RADIO PUSH BUTTONS**Optional accessories:**

USB charging set, N° 10155	p. 14
----------------------------	-------

Remo® pro Radio Remote Control

- Radio hand-held transmitter with 32 channels (number depends on the device that is controlled)
- For Controls WS1/1000 Color / Style / Connect, Solexa II, Solexa and Arexa and Touch One (Style)
For direct operation of motor control units RF Relay, RF-L, RF MSG, RF-HE, RF-VM
- Functions: up / down / stop, on / off, dimming

(depending on the device to control)

- Colour: Black glossy, housing plastic / real glass
- Approx. 64 × 122 × 14 (W × H × D, mm)
- Radio frequency: 868.2 MHz, Elsner RF
- Supply: Integrated lithium battery, charging via USB-2.0-Micro-B-charging set


N° 60522	Remo pro	X1	298.32 €
----------	-----------------	----	-----------------

**Remo® 8 Radio Remote Control**

- Radio hand-held transmitter with 8 channels
- For Controls WS1/1000 Color / Style / Connect, Solexa II, Solexa and Arexa and Touch One (Style)
- For direct operation of motor control units RF Relay, RF-L, RF MSG, RF-HE, RF-VM
- Functions: up / down / stop, on / off, dimming (depending on the device to control)

- Available in 2 colours: "white" (white / grey), "Aluminium" (white aluminium / graphite). Housing plastic (partly painted)
- Hand-held transmitter approx. 41 × 140 × 21
- With magnetic wall-mounting, approx. 54 × 150 × 11 (W × H × D, mm)
- Radio frequency: 868.2 MHz, Elsner RF
- Power supply: 3 V battery type CR2032

N° 60511	Remo 8 white	X1	172.27 €
N° 60512	Remo 8 alu	X1	172.27 €



RF-B2-UP Push Button Interface

- Connections for 2 wall push buttons (up/down or on/off)
- For Controls WS1 / 1000 Color / Style / Connect, Solexa II, Solexa and Arexa and Touch One (Style)
- For direct operation of ventilation units WL400/800 and WL-Z and of motor control units RF Relay, RF-L, RF-MSG, RF-HE, RF-VM
- Approx. 38 × 47 × 29 (W × H × D, mm)
- Connection lead 300 mm, can be extended up to 10 m
- Radio communication, Radio frequency 868.2 MHz
- Power supply: 3 V battery type CR2032

N° 60540	RF-B2-UP	X1	103.36 €
----------	-----------------	----	-----------------

RADIO CONTROL UNITS, F-CON

Optional accessories for all radio control units:

Radio Remote Controls	p. 10
Central Controls for Buildings, Conservatories	p. 6



RF-MSG-ST Wireless Motor Control Units **F-Con**

- Actuator for 1 drive (230 V AC / max. 4 A)
- Direct manual control with remote controls Remo 8/pro, push button interface RF-B2-UP
- Automatic control via WS1 / WS1000 Color / Style (version 1.20 and higher), WS1000 Connect, Solexa II
- Housing with STAK 3 connector and STAS3 plug
- Supply: 230 V AC, 50 Hz
- Radio frequency 868.2 MHz, Elsner RF


RF-MSG-ST IP53:

- IP 53, approx. 147 × 36 × 29 (W × H × D, mm)

RF-MSG-ST IP54:

- IP 54, approx. 147 × 49 × 32 (W × H × D, mm)


N° 60535	RF-MSG-ST IP53	X1	188.57 €
N° 60543	RF-MSG-ST IP54	X1	188.57 €



Connection Lines **F-Con**

- STAS3 on STAK3, with STASI security clip

N° 60565	Connection line 1 m	X1	58.77 €
N° 60566	Connection line 2.5 m	X1	62.92 €
N° 60567	Connection line 5 m	X1	70.45 €



Mains Line **F-Con**

- Shockproof socket outlet with STAK3 output and STASI security clip

N° 60563	Mains line 5 m	X1	62.92 €
----------	-----------------------	----	----------------



RF-Router (Wireless Router)

- For WS1/1000 Color/Style/Connect
- Increases radio signal range
- For up to 16 wireless device, radio frequency 868.2 MHz
- Supply: 230 V AC

RF-Router-UP:

- Installation in a socket

- Approx. 38 × 47 × 29 (W × H × D, mm)
- RF-Router-N:**
- „Adapter plug“ for power outlet CEE 7/4
- Approx. 54 × 86 × 80 (W × H × D, mm)

N° 60531	RF-Router-UP	X1	149.58 €
N° 60529	RF-Router-N	X1	163.87 €



Additional Antenna

- For WS1/1000 Color/Style
- Improves reception / transmission intensity
- Connection at the display board

- Radio frequency 868.2 MHz, Elsner RF
- Total length of antenna with cable approx. 565 mm

N° 60131	RF-Antenna	X1	59.24 €
----------	-------------------	----	----------------

RADIO SENSORS




WGT Temperature Sensor

- Additional external temperature sensor for WS1 / 1000 Color / Style (version 1.51 and higher) WS1000 Connect, Solexa II
- Contact / feed probe for indoor/outdoor applications / IP 68), length approx. 20 mm, Ø approx. 6 mm, cable approx. 3 m

- Separate evaluation electronics for installation in a socket, approx. 38 × 47 × 24 (W × H × D, mm)
- Supply: 11...28 V DC
- Radio-communication, Frequency: 868.2 MHz, Elsner RF

N° 20552	WGT	X1	144.54 €
----------	------------	----	-----------------



WGTH gl Indoor Sensor

- Additional sensors for WS1 / 1000 Color / Style / Connect, Solexa II
- For temperature and air humidity
- Plastic Housing, with glass surface
- For wall mounting in a socket, incl. frame (housing compatible with all 55 mm production frames)

- Supply: 11...28 V DC
- Radio communication, frequency 868.2 MHz, Elsner RF
- Included in delivery WS1000 Connect

N° 20557	WGTH gl pure white RAL 9010	X1	172.27 €
----------	------------------------------------	----	-----------------



WGTH-UP Indoor Sensor

- Additional sensor for WS1 / 1000 Color / Style / Connect, Solexa II (included in delivery WS1000 Color/Style)
- For temperature and humidity
- Plastic Housing, available in 2 colours: white glossy, aluminium matt

- For wall mounting in a socket, incl. frame (housing compatible with all 55 mm production frames)
- Supply: 11...28 V DC
- Radio communication, Radio frequency 868.2 MHz, Elsner RF

N° 20550	WGTH-UP white	X1	144.54 €
N° 20551	WGTH-UP aluminium coloured	X1	159.66 €

WEATHER SENSORS FOR CONTROL UNITS



Optional accessories:

Mounting of Weather Stations p. 60

P04i-GPS Weather Station

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
 - As spare part for weather stations of WS1 / 1000
 - For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)
 - Supply: 24 V DC
- Color / Style / Connect

N° 30136	P04i-GPS	X1	536.81 €
----------	-----------------	----	-----------------



Optional accessories:

Mounting of Weather Stations p. 60

P03i-GPS Wetterstation

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (internat. time signal, position)
 - As spare part for weather stations of WS1 / 1000
 - For wall / pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
 - Supply: 24 V DC
- Color / Style

N° 30114	P03i-GPS	X1	535.29 €
----------	-----------------	----	-----------------



Optional accessories:

Mounting of Weather Stations p. 60

P03/3 Replacement Weather Station

- With brightness sensor, wind speed sensor, heated precipitation sensor, outdoor temperature sensor and GPS receiver (time)
- Replacement for P00 (3-wire), P01 and P02 for controls WS1, WS10, WS20, WS1000, FS100
- For wall / pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 24 V DC

N° 30107	P03/3	X1	318.49 €
----------	--------------	----	-----------------

ACCESSORIES CONTROLS



Adapter Plugs for WS1000® Color/Style

- Allows for separate mounting of display unit and power electronics
- WS1000 Color: Surface-mount of the display is possible
- (KNX) WS1000 Style: mounting with concealed box
- Connection with 8-wire / 12-wire cable (12-wire when using the KNX interface), installed on-site, e. g. J-Y(St) 6 × 2 × 0.8; max. length 10 m

N° 60130	Adapter Plugs WS1000 Color 2 pieces	X1	62.52 €
----------	--	----	----------------



Surface-mounted Housing for WS1® Color & WS1® Style

- Housing for surface installation of WS1 Color or WS1 Style / KNX Touch One Style
- Also suitable for installation on top of the flush-mounted housing of WS20

N° 60155	Surface-mounted housing WS1 Color, white	X1	221.01 €
N° 60156	Surface-mounted housing WS1 Color, aluminium coloured	X1	221.01 €
N° 60157	Surface-mounted housing WS1 Style	X1	221.01 €



Surface Mount Housing for Indoor Sensors

- Housing for surface installation of the sensors
WGTH-UP and WGTH gl
- Fits all standard 55 mm inserts

N° 20555	Surface mount housing for 55 mm devices , white	X1	27.73 €
N° 20556	Surface mount housing for 55 mm devices , aluminium-coloured	X1	38.32 €



Charging Set

- USB 2.0 Micro-B charger
- For Solexa II-Display and Remo pro/KNX

N° 10155	USB Charger (Article of trade)	X0	13.61 €
----------	---------------------------------------	----	----------------



Adapter Plates for Conversion to Current WS1000® or WS1® Models

Adapter plate WS1000 Color:

- For mounting WS1000 Color on top of the flush-mounted housing of WS1000 (version without touch display)

- For conversion from WS1000 Style to WS1000
Connect no adapter plate is required, the flush-mounted housings are identical.

Adapter plate WS1 Color:

Adapter plates WS1000 Connect:

- For mounting WS1000 Connect on top of the flush-mounted housing of WS1000 (version without touch display) or WS1000 Color

- For mounting WS1 Color on top of the flush-mounted housing of WS20

N° 60129	Adapter plate for conversion from WS1000 to WS1000 Color	X1	52.10 €
N° 60107	Adapter plate for conversion from WS1000 to WS1000 Connect	X1	52.10 €
N° 60109	Adapter plate for conversion from WS1000 Color to WS1000 Connect	X1	52.10 €
N° 60147	Adapter plate for conversion from WS20 to WS1 Color white	X1	65.55 €
N° 601471	Adapter plate for conversion from WS20 to WS1 Color aluminium coloured	X1	65.55 €

SIMPLY
AT HOME

IRRIGATION



Optional Accessories:

TMi Ground Sensor s.b.

Jardana® Irrigation System

- Irrigation system for 4 zones
- Time controlled watering or sprinkling
- Communication via WLAN (existing external or self-generated Jardana network)
- Setup and operation via app or browser
- Irrigation according to soil moisture with accessories sensor TMi: Rain-dependent control with a common sensor or control according to soil moisture with one sensor per zone
- KNX-capable, integration into KNX system also possible at a later date
- For wall mounting, surface mounting, IP 44
- Approx. 590 × 270 × 145 (W × H × D, mm)
- Supply with 24 V AC via supplied power supply unit for 230 V AC, 50 Hz

N° 70309	Jardana NEW	X2	840,25 €
----------	--------------------	----	-----------------



TMi Soil Moisture Sensor

- Sensor for irrigation system Jardana
- Measurement of the moisture content of the soil
- For placement in the ground, IP68
- Approx. 205 × 32 × 12 (W × H × D, mm)
- With connection cable
- Only for Jardana, not suitable for other systems

N° 70313	TMi with 10 m cable NEW	X2	125,97 €
N° 70317	TMi with 25 m cable NEW	X2	134,37 €
N° 70419	TMi with 50 m cable NEW	X2	151,18 €

AIR QUALITY



Air Vision CO₂ Indicator Light

- Air quality display with integrated CO₂ sensor
- Luminous color shows air quality:
green = good | yellow = deteriorated | red = bad
- Warning tone possible for "Red" status
- Desktop device, IP20
- Approx. 105 × 47 (Ø × H, mm)
- Supply via USB-C, e.g. with the included 5 V power adapter

N° 30530	Air Vision	X0	109,20 €
----------	-------------------	----	-----------------

SMART HOME EXTENSION



KNX Matter Server

- Connects KNX with Matter and thus enables the use of Matter-based smart assistants together with a KNX building bus system
- Simple visualisation of the KNX functions in the Smart Home app
- Easily linkable function blocks for your own automation ideas, without ETS knowledge
- Use of voice control for smart assistants, integration of wireless systems, geofencing
- List of Matter-based smart assistants is constantly being expanded
- Runs locally, but also enables secure remote access
- Installation on DIN rail, 4 units, approx. 72 × 90 × 60 (W × H × D, mm)
- Supply: 12...30 V DC

N° 71256	KNX Matter Server NEW	X2	999,16 €
----------	------------------------------	----	-----------------

CONVENTIONAL
BUILDING,
INSTALLATION
TECHNOLOGY

SENSOR WITH SWITCHING OUTPUTS



Rain / Wind Sensor RW-PF

- Combined sensor for precipitation and wind speed
- Heated precipitation sensor (1.2 W)
- Potential-free change-over contacts for wind and rain alarm
- Setting of wind threshold value via DIP switches
- Rain alarm status LED inside the housing
- For wall / pole mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 12-40 V DC (12-28 V AC)

Optional Accessories:

Mounting accessories p. 60

N° 30159 **RW-PF** X1 **340.34 €**

CONVERTER



GPS-DCF-Converter ±

- Receives the international time signal UTC via GPS and converts the information to a DCF77 protocol (DCF output +24 V / - / out)
- Connection to a DCF77 signal input (as an alternative to a DCF77 antenna)
- Setting the UTC offset via DIP switches in the device
- Setting MEZ (Central European Time) includes automatic summer / winter time switchover
- Housing for surface mounting, IP 54, approx. 80 × 80 × 55 (W × H × D, mm)
- Supply: 12-24 V DC

N° 30150 **GPS-DCF-Converter UTC±** X1 **242.02 €**

GROUP CONTROL RELAYS




Group Control Relays GS2-DST **F-Con**

- Isolating relays for parallel operation of two drives in a group
- 2 outputs 230 V AC up / down (STAK3 connector), total max. 4 A
- 230 V AC central input for group control up / down (STAS3)
- Cascadable
- Housing with STAS3 plug and STAK3 connectors
- Approx. 135 × 73 × 29 (B × H × T, mm)
- Supply: 230 V AC, 50 Hz

N° 60560 **GS2-DST F-Con** X1 **126.89 €**

Connection scheme

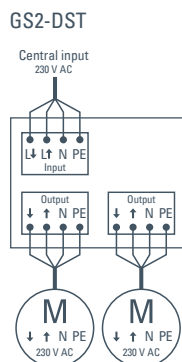

POWER SUPPLY UNITS



24 V DC Power Supply Units

- For devices with 24 V AC supply voltage
- Input voltage: 230 V AC, 50 Hz
- Output voltage: 24 V DC

PS2500:

- Power 60 W, output current max. 2.5 A
- DIN-rail mounting 3 units, approx. 54 × 95 × 68.5 (W × H × D, mm)

PS6250:

- Power 150 W, output current max. 6.25 A
- DIN-rail mounting 4 units, approx. 72 × 93 × 68.5 (W × H × D, mm)

N° 20206	PS2500	X1	134.45 €
N° 20204	PS6250	X1	184.03 €

MODBUS and RS485

MODBUS SENSORS



Optional Accessories:

Surface mount housing p. 60

eTR 101 Modbus Room temperature control unit

- Temperature control unit: Display of temperature, temperature changes via push buttons
- Integrated temperature sensor
- Modbus communication RTU
- Glass surface, available in 2 colours: signal white RAL 9003, jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Construction/Installation depth approx. 12.5 mm. Mounting with or without device socket
- Supply: 24 V DC ±10%



N° 30184	eTR 101 Modbus signal white RAL 9003 NEW with locking screw	X1	119.33 €
N° 30185	eTR 101 Modbus jet black RAL 9005 NEW with locking screw	X1	119.33 €
N° 30180	eTR 101 Modbus signal white RAL 9003 – Discontinued item, 20% sale discount	X1	95.46 €
N° 30181	eTR 101 Modbus jet black RAL 9005 – Discontinued item, 20% sale discount	X1	95.46 €



Indoor Sensors Sewi® Modbus

- Wall /Ceiling sensor (Surface mounting)
- Modbus communication RTU
- Surface mount housing white (skirting RAL 9003, cover RAL 9002), IP 30, diameter 105 mm, height 32 mm
- Supply: 24 V DC ±10%. A suitable power supply unit can be obtained from Elsner Elektronik.

Sewi AQS/TH Modbus:

- Measurement of temperature, humidity and CO₂, calculation of dew point temperature

Sewi TH Modbus:

- Measurement of temperature and humidity, calculation of dew point temperature

N° 30174	Sewi AQS/TH Modbus	X1	311.76 €
N° 30175	Sewi TH Modbus	X1	215.13 €



P03-Modbus Weather Stations

- 3 brightness sensors (east, south, west), electronic wind speed sensor, heated precipitation sensor and outdoor temperature sensor
- Modbus communication RTU
- For wall / pole mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 24 V DC ±10%. A suitable power supply unit can be obtained from Elsner Elektronik.

P03/3-Modbus:

- Without reception of a time signal

P03/3-Modbus-GPS:

- With GPS receiver
- Output: UTC (Universal Time Coordinated), position
- Calculation of the position of the sun (azimuth / elevation)

Optional Accessories:

Mounting accessories p. 60

N° 30146	P03/3-Modbus	X1	448.74 €
N° 30147	P03/3-Modbus-GPS	X1	579.83 €



Modbus surface mounted sensor for outdoor use

- Sensor for indoor / outdoor use
- Measurement of temperature and humidity, calculation of dew point temperature
- Modbus communication RTU
- Surface mounting, IP65, approx. 65 × 93 × 38 (W × H × D, mm)
- Supply: 24 V DC ±10%. A suitable power supply unit can be obtained from Elsner Elektronik.

N° 30170	TH-AP Modbus	X1	226.89 €
----------	---------------------	----	-----------------


RS485 SENSORS



Suntracer RS485 pro Weather Station

- Wind speed sensor, wind direction sensor
- Heated precipitation sensor
- Brightness sensors for east, south and west sun, daylight (sky sensor), twilight detection
- Temperature sensor, humidity sensor (relative, absolute), air pressure sensor
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Calculation of dew point
- RS485 interface for data output
- For pole mounting, IP 44, approx. 255 × 140 × 274 (W × H × D, mm, without mounting)
- Supply: 24 V DC ±10%
- Delivery with 24 V DC power supply unit PS2500 (N° 20206), mounting pole 50 cm with mounting accessories

N° 30167	Suntracer RS485 pro	X1	1,789.92 €
----------	----------------------------	----	-------------------



P04-RS485 Weather Stations

- 3 brightness sensors (east, south, west), electronic wind speed sensor, heated precipitation sensor and outdoor temperature sensor
- RS485 interface for data output
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm)
- Supply: 24 V DC ±10%
- **P04/3-RS485-GPS:**
 - With GPS receiver, Output of UTC (the Coordinated Universal Time)
- **P04/3-RS485-CET:**
 - Calculation of the position of the sun (azimuth/elevation)
 - With GPS receiver, Output CET (the central european time) with summer / winter time switchover
- **P04/3-RS485 basic:**
 - Calculation of the position of the sun (azimuth/elevation)
 - No time function

Optional Accessories:

Mounting accessories	p. 60
24 V DC Power Supply Units	p. 19

N° 30152	P04/3-RS485-GPS	X1	579.83 €
N° 30153	P04/3-RS485-CET	X1	579.83 €
N° 30154	P04/3-RS485 basic	X1	328.57 €



P03-RS485 Weather Stations

- 3 brightness sensors (east, south, west), electronic wind speed sensor, heated precipitation sensor and outdoor temperature sensor
- RS485 interface for data output
- 1 s data sending cycle
- For wall / pole mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm)
- Supply: 24 V DC ±10%
- **P03/3-RS485-GPS:**
 - With GPS receiver, Output of UTC (the Coordinated Universal Time)
- **P03/3-RS485-CET:**
 - Calculation of the position of the sun (azimuth/elevation)
 - With GPS receiver, Output CET (the central european time) with summer / winter time switchover
- **P03/3-RS485 basic:**
 - Calculation of the position of the sun (azimuth/elevation)
 - No time function


Optional Accessories:

Mounting accessories	p. 60
24 V DC Power Supply Units	p. 19

N° 30145	P03/3-RS485-GPS	X1	593.28 €
N° 30151	P03/3-RS485-CET	X1	593.28 €
N° 30140	P03/3-RS485 basic	X1	342.86 €



GLASS BUTTON

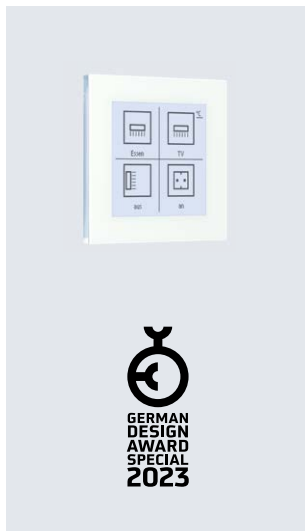

Nunio® KNX M-T Universal Glass Touch Button

- Display with one, two, three or four touch buttons (selectable). Icon and text selectable for each button. Can be configured as a switch, selector switch, drive (blind, shutter, awning or window with short/long distinction), window, dimmer, 8- or 16-bit encoder or for scene recall/saving.
- Additional surface function when touching with the palm of the hand or wiping
- Temperature PI controller for heating/cooling and fan coil control
- Display for temperature control with keys +/- (warmer, cooler), setpoint display, mode selection and fan level setting
- Temperature sensor with calculation of mixed values (own/external), output of minimum/maximum values
- 2 temperature limit values
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Glass surface, pure white RAL 9010
- Display and frame illuminated, basic and operating brightness adjustable
- Dimensions approx. 85 × 85 (W × H, mm). Mounting depth approx. 12.5 mm. Installation in device socket with 2 spring clips in support ring
- Supply: bus voltage
- Delivery with installation instructions², support ring

N° 71280	Nunio KNX M-T	X2	184.03 €
----------	----------------------	----	-----------------

SERIES KNX eTR



KNX eTR 101 Temperature Controller


- Temperature PI controller for heating/cooling
- Display of temperature, adjustment of target temperature via touch buttons
- Temperature sensor with calculation of mixed values
- 2 temperature limit values
- Configuration with ETS
- Glass surface signal white RAL 9003 or jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
- Supply: bus voltage
- With installation instructions²
- **KNX eTR 101-BA2 additionally:**
- 2 inputs (binary / temperature sensor T-NTC)

N° 70653	KNX eTR 101 signal white RAL 9003 NEW with locking screw	X2	133.61 €
N° 70654	KNX eTR 101 jet black RAL 9005 NEW with locking screw	X2	133.61 €
N° 70650	KNX eTR 101 signal white RAL 9003 – Discontinued item, 20% discount	X2	106.89 €
N° 70651	KNX eTR 101 jet black RAL 9005 – Discontinued item, 20% discount	X2	106.89 €
N° 71313	KNX eTR 101-BA2 signal white RAL 9003 NEW with locking screw	X2	138.32 €
N° 71314	KNX eTR 101-BA2 jet black RAL 9005 NEW with locking screw	X2	138.32 €
N° 71310	KNX eTR 101-BA2 signal white RAL 9003 – Discontinued item, 20% discount	X2	110.66 €
N° 71312	KNX eTR 101-BA2 jet black RAL 9005 – Discontinued item, 20% discount	X2	110.66 €

Optional Accessories:

Surface mount housing	p. 60
T-NTC, N° 30516	p. 60

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

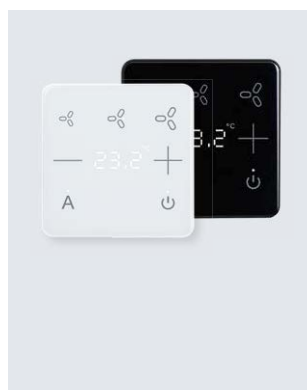
**Optional Accessories:**

Surface mount housing p. 60

KNX eTR 102 FC Controller for Fan Coil Air-Conditioning

- Temperature controller for fan coil air-conditioning systems with PI control
- Display of temperature, adjustment of target temperature via touch buttons
- Temperature sensor with calculation of mixed values
- 2 temperature limit values
- Display of 3 fan levels via symbols and LEDs
- Touch buttons for automatic mode and for switching off the air conditioning, with LEDs
- Configuration with ETS
- Glass surface signal white RAL 9003 or jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
- Supply: bus voltage
- With installation instructions²

N° 71323	KNX eTR 102 FC signal white RAL 9003 NEW with locking screw	X2	139.16 €
N° 71324	KNX eTR 102 FC jet black RAL 9005 NEW with locking screw	X2	139.16 €
N° 71320	KNX eTR 102 FC signal white RAL 9003 – Discontinued item, 20% sale discount	X2	111.33 €
N° 71322	KNX eTR 102 FC jet black RAL 9005 – Discontinued item, 20% sale discount	X2	111.33 €

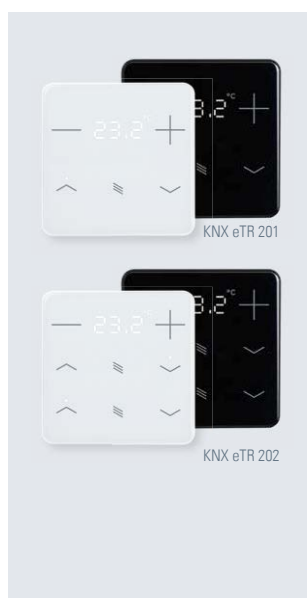**Optional Accessories:**

Surface mount housing p. 60

KNX eTR 201/202 Sunblind Temperature Controller and Sunblind Button

- Temperature PI controller for heating/cooling
- Display of temperature, adjustment of target temperature via touch buttons
- Temperature sensor with calculation of mixed values
- 2 temperature limit values
- Area function when touching two or more buttons simultaneously
- LEDs for optical feedback
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Glass surface signal white RAL 9003 or jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
- Supply: bus voltage
- With installation instructions²

KNX eTR 201 Sunblind:


- 2 touch surfaces for 1 drive (up/down, icon "Shading")

KNX eTR 202 Sunblind:

- 2x2 touch surfaces for 2 drives (each up/down with icon "Shading")

N° 71093	KNX eTR 201 Sunblind, signal white RAL 9003 NEW with locking screw	X2	150.42 €
N° 71094	KNX eTR 201 Sunblind, jet black RAL 9005 NEW with locking screw	X2	150.42 €
N° 71090	KNX eTR 201 Sunblind, signal white RAL 9003 – Discontinued item, 20% sale discount	X2	120.34 €
N° 71092	KNX eTR 201 Sunblind, jet black RAL 9005 – Discontinued item, 20% sale discount	X2	120.34 €
N° 71103	KNX eTR 202 Sunblind, signal white RAL 9003 NEW with locking screw	X2	155.46 €
N° 71104	KNX eTR 202 Sunblind, jet black RAL 9005 NEW with locking screw	X2	155.46 €
N° 71100	KNX eTR 202 Sunblind, signal white RAL 9003 – Discontinued item, 20% sale discount	X2	124.37 €
N° 71102	KNX eTR 202 Sunblind, jet black RAL 9005 – Discontinued item, 20% sale discount	X2	124.37 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

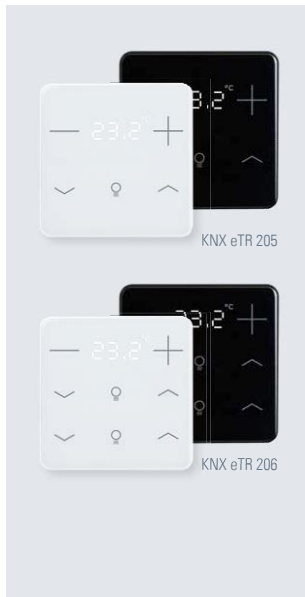


Optional Accessories:
Surface mount housing p. 60

KNX eTR 205/206 Light Temperature Controller and Light Button

- Temperature PI controller for heating/cooling
 - Display of temperature, adjustment of target temperature via touch buttons
 - Integrated temperature sensor with calculation of mixed values (own/external value)
 - 2 temperature limit values
 - Area function when touching two or more buttons simultaneously
 - LEDs for optical feedback
 - Logic gates (2 AND, 2 OR)
 - Configuration with ETS
 - Glass surface signal white RAL 9003 or jet black RAL 9005
 - Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
 - Supply: bus voltage
 - With installation instructions²
- KNX eTR 205 Light:**
- 2 touch surfaces for 1 light (down/up with icon "Lamp")
- KNX eTR 206 Light:**
- 2×2 touch surfaces for 2 lights (each down/up with icon "Lamp")

N° 71163	KNX eTR 205 Light, signal white RAL 9003 NEW with locking screw	X2	150.42 €
N° 71164	KNX eTR 205 Light, jet black RAL 9005 NEW with locking screw	X2	150.42 €
N° 71160	KNX eTR 205 Light, signal white RAL 9003 – Discontinued item, 20% discount	X2	120.34 €
N° 71162	KNX eTR 205 Light, jet black RAL 9005 – Discontinued item, 20% discount	X2	120.34 €
N° 71173	KNX eTR 206 Light, signal white RAL 9003 NEW with locking screw	X2	155.46 €
N° 71174	KNX eTR 206 Light, jet black RAL 9005 NEW with locking screw	X2	155.46 €
N° 71170	KNX eTR 206 Light, signal white RAL 9003 – Discontinued item, 20% discount	X2	124.37 €
N° 71172	KNX eTR 206 Light, jet black RAL 9005 – Discontinued item, 20% discount	X2	124.37 €

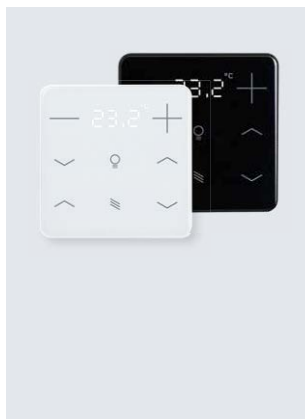

Optional Accessories:
Surface mount housing p. 60

KNX eTR 208 Light/Sunblind Temperature Controller and Buton for Light & Sunblind

- Temperature PI controller for heating/cooling
- Display of temperature, adjustment of target temperature via touch buttons
- Integrated temperature sensor with calculation of mixed values (own/external value)
- 2 temperature limit values
- 2 touch surfaces for 1 light (down/up with icon "Lamp")
- 2 touch surfaces for 1 drive (up/down, icon "Shading")
- Area function when touching two or more buttons simultaneously
- LEDs for optical feedback
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Glass surface signal white RAL 9003 or jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
- Supply: bus voltage
- With installation instructions²

N° 71193	KNX eTR 208 Light/Sunblind, signal white RAL 9003 NEW with locking screw	X2	155.46 €
N° 71194	KNX eTR 208 Light/Sunblind, jet black RAL 9005 NEW with locking screw	X2	155.46 €
N° 71190	KNX eTR 208 Light/Sunblind, signal white RAL 9003 – Discontinued item, 20% discount	X2	124.37 €
N° 71192	KNX eTR 208 Light/Sunblind, jet black RAL 9005 – Discontinued item, 20% discount	X2	124.37 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

**Optional Accessories:**

Surface mount housing p. 60

KNX eTR M Push Buttons

- KNX push button with touch surface
- LED for optical feedback in each button field
- Button function adjustable via ETS
- Integrated temperature sensor with calculation of mixed values (own/external value)
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Glass surface, available in 2 colours: signal white RAL 9003, jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
- Supply: bus voltage
- With installation instructions²

KNX eTR M1:

- Single push button

KNX eTR M2:

- Double push button
- Configurable as switch, selector switch, dimmer, for operating drives, as 8- or 16-bit value encoder or for scene recall/saving
- Area function when touching both touch buttons

KNX eTR M4:

- Four-gang push button
- Configurable as switch, selector switch, dimmer, for operating drives, as 8- or 16-bit value encoder or for scene recall/saving
- Area function when touching two or more touch buttons simultaneously

N° 71113	KNX eTR M1 signal white RAL 9003 NEW with locking screw	X2	126.89 €
N° 71114	KNX eTR M1 jet black RAL 9005 NEW with locking screw	X2	126.89 €
N° 71110	KNX eTR M1 signal white RAL 9003 – Discontinued item, 20% sale discount	X2	101.51 €
N° 71112	KNX eTR M1 jet black RAL 9005 – Discontinued item, 20% sale discount	X2	101.51 €
N° 71123	KNX eTR M2 signal white RAL 9003 NEW with locking screw	X2	131.93 €
N° 71124	KNX eTR M2 jet black RAL 9005 NEW with locking screw	X2	131.93 €
N° 71120	KNX eTR M2 signal white RAL 9003 – Discontinued item, 20% sale discount	X2	105.54 €
N° 71122	KNX eTR M2 jet black RAL 9005 – Discontinued item, 20% sale discount	X2	105.54 €
N° 71133	KNX eTR M4 signal white RAL 9003 NEW with locking screw	X2	139.16 €
N° 71134	KNX eTR M4 jet black RAL 9005 NEW with locking screw	X2	139.16 €
N° 71130	KNX eTR M4 signal white RAL 9003 – Discontinued item, 20% sale discount	X2	111.33 €
N° 71132	KNX eTR M4 jet black RAL 9005 – Discontinued item, 20% sale discount	X2	111.33 €

**Optional Accessories:**

Surface mount housing p. 60


KNX eTR gl Temperature Sensor with Automatic Control

- Temperature sensor with calculation of mixed values and PI controller for heating/cooling
- 2 temperature limit values
- Configuration with ETS
- Glass surface, available in 2 colours: signal white RAL 9003, jet black RAL 9005
- Dimensions approx. 81.5 × 81.5 (W × H, mm). Mounting depth approx. 12.5 mm. Mounting with or without device socket
- Supply: bus voltage
- With installation instructions²

N° 71303	KNX eTR gl , signal white RAL 9003 NEW with locking screw	X2	121.01 €
N° 71304	KNX eTR gl , jet black RAL 9005 NEW with locking screw	X2	121.01 €
N° 71300	KNX eTR gl , signal white RAL 9003 – Discontinued item, 20% sale discount	X2	96.81 €
N° 71302	KNX eTR gl , jet black RAL 9005 – Discontinued item, 20% sale discount	X2	96.81 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

KNX ROOM CONTROLLER & SENSORS – FOR FRAMES 55 MM

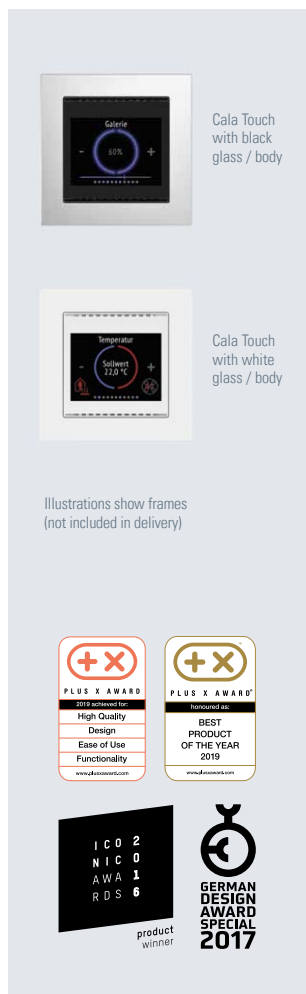

Optional Accessory:

T-NTC, N° 30516

p. 60

Room Controller Cala® Touch KNX

- Touch user interface for operation of light, shading, windows, heating, air conditioning and scenes (adjustable). Display of values and texts
- Up to 3 user interfaces for light (switching or dimming with display of the current value); Setting pages for RGB colour and for colour temperature
- Integrated biodynamic lighting control (human centric lighting)
- Up to 3 user interfaces for shading or window with display of current travel / slat position
- User interface for heating and climate, integrated temperature sensor
- User interfaces for up to 4 scenes
- Measurement display
- Display page for up to 4 bus values
- Up to 2 info pages, each for displaying 2 text objects
- Weekly timer with 8 time periods
- Screen saver (time, indoor / outdoor temperature or off)
- Calculation of mixed values (own / external value), threshold values
- Logic gates (8 AND / 8 OR), 8 multifunctional modules (for calculation, conditions, transition), 4 actuating variable comparator, summer compensation for cooling
- Configuration with ETS
- 4 inputs (binary inputs or for temperature sensor T-NTC)
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- Supply: bus voltage
- Delivery with installation instructions², support ring and connecting cable for inputs

Cala KNX T:

- Temperature sensor
- PI controller for heating / cooling

Cala KNX TH:

- Temperature sensor and humidity sensor with calculation of the dewpoint and monitoring of the comfort field (DIN 1946)
- PI controller for heating / cooling and ventilation (dehumidification / humidification)

Cala KNX AQS/TH:

- Sensor for CO₂, temperature and humidity with calculation of the dewpoint and monitoring of the comfort field (DIN 1946)
- PI controller for heating / cooling and ventilation (CO₂, dehumidification / humidification)

N° 70800	Cala Touch KNX T 3.x white	X2	296.64 €
N° 70802	Cala Touch KNX T 3.x black	X2	296.64 €
N° 70810	Cala Touch KNX TH 3.x white	X2	321.01 €
N° 70812	Cala Touch KNX TH 3.x black	X2	321.01 €
N° 70820	Cala Touch KNX AQS/TH 3.x white	X2	462.10 €
N° 70822	Cala Touch KNX AQS/TH 3.x black	X2	462.10 €



KNX AQS/TH-UP Touch und KNX AQS/TH-UP gl Combined Sensors

- Indoor sensor for CO₂ concentration, temperature and air humidity (relative, absolute)
- Calculation of dew point, monitoring of the comfort field (DIN 1946)
- 9 threshold values (adjustable per parameter or object), mixed values (own / external value)
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling (temperature) and ventilation (CO₂, dehumidification / humidification)
- Configuration with ETS
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- Supply: bus voltage
- With installation instructions² and support ring

KNX AQS/TH-UP gl:


- Without display, without push buttons

KNX AQS/TH-UP Touch:

- Value and scale display (setpoint temperature)
- Touch buttons: Can be used as bus buttons, for changing the setpoint temperature or for mode switching

N° 70626	KNX AQS/TH-UP gl pure white RAL 9010	X2	340.34 €
N° 70625	KNX AQS/TH-UP gl jet black RAL 9005	X2	340.34 €
N° 70620	KNX AQS/TH-UP Touch pure white RAL 9010	X2	368.91 €
N° 70619	KNX AQS/TH-UP Touch jet black RAL 9005	X2	368.91 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

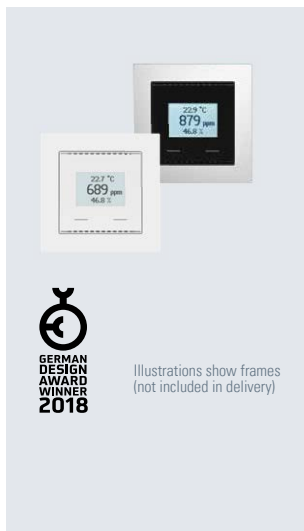

KNX VOC/TH-UP Touch Combined Sensor

- Indoor sensor for mixed gas concentration (volatile organic compounds), temperature and humidity (relative, absolute)
- Calculation of dew point, monitoring of the comfort field (DIN 1946)
- 9 threshold values (adjustable per parameter or object), calculation of mixed values (own/external value)
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling (temperature) and ventilation (mixed gas, dehumidification / humidification)
- Configuration with ETS
- Display: Value and scale display (target temperature)
- Touch buttons: Can be used as bus push button, to change the setpoint temperature or to switch modes
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- Supply: bus voltage
- With installation instructions² and support ring

N° 70970	KNX VOC/TH-UP Touch pure white RAL 9010	X2	368.91 €
N° 70973	KNX VOC/TH-UP Touch jet black RAL 9005	X2	368.91 €



KNX TH-UP Touch and KNX TH-UP gl Temperature/Humidity Sensors

- Indoor sensor for temperature and humidity (relative, absolute)
- Calculation of dew point, monitoring of the comfort field (DIN 1946)
- 7 threshold values (adjustable per parameter or object), calculation of mixed values (own / external value)
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling (temperature) and ventilation (dehumidification / humidification)
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- With installation instructions² and support ring
- KNX TH-UP gl:**
 - Without display, without push buttons
- KNX TH-UP Touch:**
 - Value and scale display (setpoint temperature)
 - Touch buttons: Can be used as bus push buttons, for changing the setpoint temperature or for mode switching

N° 70623	KNX TH-UP gl pure white RAL 9010	X2	211.93 €
N° 70622	KNX TH-UP gl jet black RAL 9005	X2	211.93 €
N° 70617	KNX TH-UP Touch pure white RAL 9010	X2	243.70 €
N° 70616	KNX TH-UP Touch jet black RAL 9005	X2	243.70 €



KNX T-L-Pr-UP Touch Combined Presence Sensor

- Presence detector (PIR/passive infrared, range 5 m) as master or slave
- Brightness sensor with threshold values
- Indoor temperature sensor with calculation of mixed values
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Supply: bus voltage
- 2 touch buttons (bus push button)
- 2 status LEDs (free assignable)
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- With installation instructions² and support ring

N° 70850	KNX T-L-Pr-UP Touch pure white RAL 9010	X2	248.74 €
N° 70852	KNX T-L-Pr-UP Touch jet black RAL 9005	X2	248.74 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



KNX T-UP Touch and KNX T-UP gl Temperature Sensors

- Indoor sensor for temperature
- Threshold values, calculation of mixed values
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling
- Configuration with ETS
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- Supply: bus voltage
- With installation instructions² and support ring

KNX T-UP gl:

- Without display, without push buttons

KNX T-UP Touch:

- Display for measured values, bus data (e.g. date, time), mode, bargraph for target value change
- Touch buttons: Can be used as bus push buttons, for changing the setpoint temperature or for mode

N° 70632	KNX T-UP gl pure white RAL 9010	X2	201.68 €
N° 70631	KNX T-UP gl jet black RAL 9005	X2	201.68 €
N° 70629	KNX T-UP Touch pure white RAL 9010	X2	234.45 €
N° 70628	KNX T-UP Touch jet black RAL 9005	X2	234.45 €



Cala® KNX T 101/201/202 Temperature controller

- Temperature controller with PI controller for heating/cooling
 - Integrated temperature sensor with calculation of mixed values (own/external value)
 - 2 temperature limit values
 - Configuration with ETS
 - Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
 - Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
 - Supply: bus voltage
 - With installation instructions² and support ring
- Cala KNX T 101:**
- Display of temperature, adjustment of target temperature via push buttons
- Cala KNX T 201 Sunblind:**
- Display of temperature, adjustment of target temperature via push buttons
 - 2 touch surfaces for 1 drive (up/down with icon "Shading")
 - Additional area function when touching two or more buttons simultaneously
 - LEDs for optical feedback
 - Logic gates (2 AND, 2 OR)
- Cala KNX T 202 Sunblind:**
- Display of temperature, adjustment of target temperature via push buttons
 - 2x2 touch surfaces for 2 drives (each up/down with icon "Shading")
 - Additional area function when touching two or more buttons simultaneously
 - LEDs for optical feedback
 - Logic gates (2 AND, 2 OR)

N° 70980	Cala KNX T 101 pure white RAL 9010	X2	169.75 €
N° 70982	Cala KNX T 101 jet black RAL 9005	X2	169.75 €
N° 70990	Cala KNX T 201 Sunblind pure white RAL 9010	X2	187.06 €
N° 70992	Cala KNX T 201 Sunblind jet black RAL 9005	X2	187.06 €
N° 71050	Cala KNX T 202 Sunblind pure white RAL 9010	X2	211.68 €
N° 71052	Cala KNX T 202 Sunblind jet black RAL 9005	X2	211.68 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



KNX T-UP Temperature Sensors

- Thermometer for indoor applications
- 4 threshold values, calculation of mixed values
- Logic gates (8 AND, 8 OR)
- PI controller for heating / cooling
- Configuration with ETS
- Colour similar to traffic white RAL 9016, glossy
- Can be combined with switch systems with frame size 55 mm. For installation in a socket. Frame not included.

- Supply: bus voltage
- Delivery with installation instructions²


KNX T-UP basic:

- Without display, without push buttons

KNX T-B-UP:

- With display and push buttons. Change of target temperature with bargraph in the display

N° 70350	KNX T-UP basic white	X2	168.07 €
N° 70358	KNX T-B-UP white	X2	208.40 €



KNX T-Objekt-UP Temperature Sensor

- Object controller with indoor temperature sensor
- 3 switching outputs with adjustable limit values, calculation of mixed values (own / external value)
- Logic gates (4 AND, 4 OR)
- PI controller for heating / cooling
- Configuration with ETS

- For installation in a socket, for a blind cover of popular switch series (delivery without cover)
- Dimensions mounting plate / sensor board approx. 70 × 70 (W × H, mm)
- Supply: bus voltage
- Delivery with installation instructions²

N° 70179	KNX T-Objekt-UP 3.2	X2	115.97 €
----------	----------------------------	----	-----------------



Cala® KNX MultiTouch T Push Button

- KNX push button with touch surface
- 3 operating zones arranged one above the other, printed with function icons for light (switch / dim), drive (shading), temperature. 3 touch surfaces per zone, freely configurable
- LEDs for optical feedback
- Integrated temperature sensor with calculation of mixed values (own / external value)
- PI controller for heating / cooling
- Logic gates (4 AND, 4 OR)
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- With installation instructions² and support ring

Cala KNX MultiTouch T Light:

- Operating zone for light (switching, brighter, darker)
- Free zone with 3 touch surfaces for individual assignment
- Operating zone for temperature control (warmer, cooler, changeover heating/cooling)

Cala KNX MultiTouch T Light/Sunblind:


- Operating zone for light (switching, brighter, darker)
- Operating zone for blinds/sunshades (up/down with short/long distinction, movement position)
- Operating zone for temperature control (warmer, cooler, changeover heating/cooling)

Cala KNX MultiTouch T Light/Scenes:

- Operating zone for light (switching, brighter, darker)
- Operating zone for temperature control (warmer, cooler, changeover heating/cooling)
- Operating zone for scene call and saving

N° 70950	Cala KNX MultiTouch T Light, pure white RAL 9010	X2	241.18 €
N° 70952	Cala KNX MultiTouch T Light, jet black RAL 9005	X2	241.18 €
N° 70890	Cala KNX MultiTouch T Light/Sunblind, pure white RAL 9010	X2	241.18 €
N° 70892	Cala KNX MultiTouch T Light/Sunblind, jet black RAL 9005	X2	241.18 €
N° 70960	Cala KNX MultiTouch T Light/Scenes, pure white RAL 9010	X2	241.18 €
N° 70962	Cala KNX MultiTouch T Light/Scenes, jet black RAL 9005	X2	241.18 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

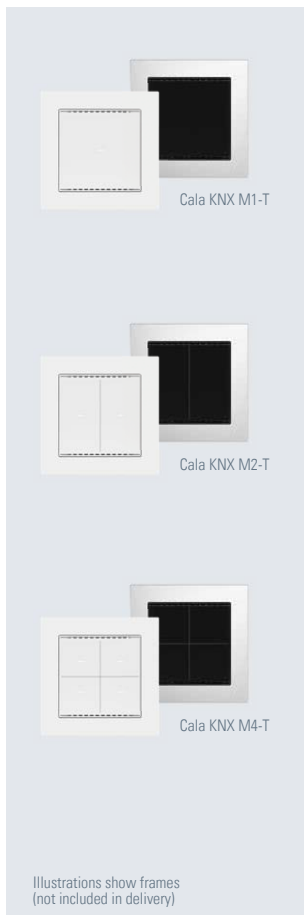

Cala® KNX M-T Push Buttons

- KNX push button with touch surface
- LED for optical feedback in each button
- Function of button adjustable via ETS
- Integrated temperature sensor with calculation of mixed values (own / external value)
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included
- With installation instructions² and support ring

Cala KNX M1-T:

- Single push button

- Configurable as switch, selector switch, dimmer, blind (position and slat up/stop OR down/stop), roller shutter (up/down/stop), awning (in/out/stop), window (close/open/stop), as 8- or 16-bit encoder or for scene recall/saving


Cala KNX M2-T:

- Double push button
- Configurable as switch, selector switch, dimmer, for operating drives, as 8- or 16-bit value encoder or for scene recall/saving
- Additional area function when touching both touch buttons

Cala KNX M4-T:

- Four-gang push button
- Configurable as switch, selector switch, dimmer, for operating drives, as 8- or 16-bit value encoder or for scene recall/saving
- Additional area function when touching three or more buttons simultaneously

N° 70860	Cala KNX M1-T pure white RAL 9010	X2	163.36 €
N° 70862	Cala KNX M1-T jet black RAL 9005	X2	163.36 €
N° 70870	Cala KNX M2-T pure white RAL 9010	X2	175.63 €
N° 70872	Cala KNX M2-T jet black RAL 9005	X2	175.63 €
N° 70880	Cala KNX M4-T pure white RAL 9010	X2	187.06 €
N° 70882	Cala KNX M4-T jet black RAL 9005	X2	187.06 €

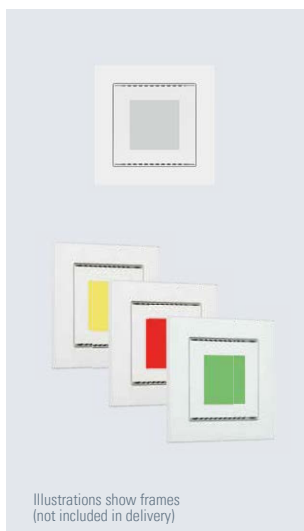

Cala® KNX IL Indicator Light

- Light signal with indicator function
- LED color field can glow/flash green, yellow or red or be switched off. Control via communication object (3× one-bit, scene, percent with threshold, two-byte floating point with threshold)
- Logic gates (4 AND, 4 OR), actuating variable comparator
- Configuration with ETS
- Supply: bus voltage
- Can be combined with switch systems with frame size 55 mm. Wall mounting in socket with 2 fastening clamps in support ring. Frame not included

- With installation instructions² and support ring
- Glass surface, colour: pure white RAL 9010
- With installation instructions² and support ring


Cala KNX IL CO2:

- Sensor for CO₂ concentration, value can be used for indicator light function
- 4 threshold values (adjustable per parameter or object), calculation of mixed values (own/external value)
- PI controller for ventilation

N° 71380	Cala KNX IL pure white RAL 9010	X2	122.69 €
N° 71390	Cala KNX IL CO2 pure white RAL 9010	X2	242.86 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

KNX ROOM CONTROLLER & SENSORS – FOR SWISS SYSTEM

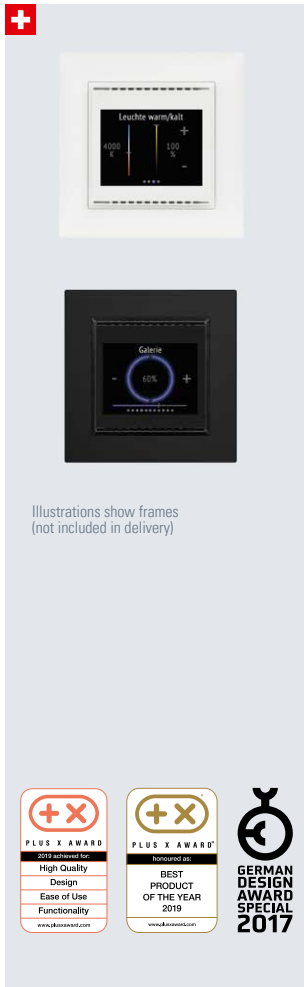

Optional Accessory:

T-NTC, N° 30516

p. 60

Cala® Touch KNX CH Room Controller

- Touch user interface for operation of light, shading, windows, heating, air conditioning and scenes (adjustable). Display of values and texts
- Up to 3 user interfaces for light (switching or dimming with display of the current value); Setting pages for RGB colour and for colour temperature
- Integrated biodynamic lighting control (human centric lighting)
- Up to 3 user interfaces for shading or window with display of current travel / slat position
- User interface for heating and climate, integrated temperature sensor
- User interfaces for up to 4 scenes
- Measurement display
- Display page for up to 4 bus values
- Up to 2 info pages, each for displaying 2 text objects
- Weekly timer with 8 time periods
- Screen saver (time, indoor / outdoor temperature or off)
- Calculation of mixed values (own / external value), threshold values
- Logic gates (8 AND / 8 OR), 8 multifunctional modules (for calculation, conditions, transition), 4 actuating variable comparator, summer compensation for cooling
- Configuration with ETS
- 4 inputs (binary inputs or for temperature sensor T-NTC)
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- Supply: bus voltage
- With installation instructions², mounting adapter and connecting cable for inputs

Cala Touch KNX T CH:

- Temperature sensor
- PI controller for heating / cooling

Cala Touch KNX TH CH:

- Temperature sensor and humidity sensor with calculation of the dewpoint and monitoring of the comfort field (DIN 1946)
- PI controller for heating / cooling and ventilation (dehumidification / humidification)

Cala Touch KNX AQS/TH CH:

- Sensor for CO₂, temperature and humidity with calculation of the dewpoint and monitoring of the comfort field (DIN 1946)
- PI controller for heating / cooling and ventilation (CO₂, dehumidification / humidification)

N° 70801	Cala Touch KNX T CH pure white RAL 9010	X2	296.64 €
N° 70803	Cala Touch KNX T CH jet black RAL 9005	X2	296.64 €
N° 70811	Cala Touch KNX TH CH pure white RAL 9010	X2	321.01 €
N° 70813	Cala Touch KNX TH CH jet black RAL 9005	X2	321.01 €
N° 70821	Cala Touch KNX AQS/TH CH pure white RAL 9010	X2	462.10 €
N° 70823	Cala Touch KNX AQS/TH CH jet black RAL 9005	X2	462.10 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



KNX AQS/TH-UP Touch CH and KNX AQS/TH-UP gl CH Combined Sensors

- Indoor sensor for CO₂ concentration, temperature and air humidity (relative, absolute)
- Calculation of dew point, monitoring of the comfort field (DIN 1946)
- 9 threshold values (adjustable per parameter or object), mixed values (own / external value)
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling (temperature) and ventilation (CO₂, dehumidification / humidification)
- Configuration with ETS
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- Supply: bus voltage
- With installation instructions² and mounting adapter

KNX AQS/TH-UP gl CH:

- Without display, without push buttons

KNX AQS/TH-UP Touch CH:

- Value and scale display (setpoint temperature)
- Touch buttons: Can be used as bus buttons, for changing the setpoint temperature or for mode switching

N° 70646	KNX AQS/TH-UP gl CH pure white RAL 9010	X2	340.34 €
N° 70647	KNX AQS/TH-UP gl CH jet black RAL 9005	X2	340.34 €
N° 70639	KNX AQS/TH-UP Touch CH pure white RAL 9010	X2	368.91 €
N° 70643	KNX AQS/TH-UP Touch CH jet black RAL 9005	X2	368.91 €



KNX VOC/TH-UP Touch CH Combined Sensor

- Indoor sensor for mixed gas concentration (volatile organic compounds), temperature and humidity (relative, absolute)
- Calculation of dew point, monitoring of the comfort field (DIN 1946)
- 9 threshold values (adjustable per parameter or object), calculation of mixed values (own/external value)
- Logic gates (4 AND, 4 OR), variable comparators
- PI controllers for heating / cooling (temperature) and ventilation (mixed gas, dehumidification / humidification)
- Configuration with ETS
- Display: Value and scale display (target temperature)
- Touch buttons: Can be used as bus push button, to change the setpoint temperature or to switch modes
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- With installation instructions² and support ring

N° 70972	KNX VOC/TH-UP Touch CH pure white RAL 9010	X2	368.91 €
N° 70974	KNX VOC/TH-UP Touch CH jet black RAL 9005	X2	368.91 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



KNX TH-UP Touch CH and KNX TH-UP gl CH Temperature/Humidity Sensors

- Indoor sensor for temperature and humidity (relative, absolute)
- Calculation of dew point, monitoring of the comfort field (DIN 1946)
- 7 threshold values (adjustable per parameter or object), mixed value calculation (own/external value)
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling (temperature) and ventilation (dehumidification / humidification)
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- With installation instructions² and mounting adapter

KNX TH-UP gl CH:

- Without display, without push buttons

KNX TH-UP Touch CH:

- Value and scale display (setpoint temperature)
- Touch buttons: Can be used as bus push buttons, for changing the setpoint temperature or for mode switching

N° 70644	KNX TH-UP gl CH pure white RAL 9010	X2	211.93 €
N° 70645	KNX TH-UP gl CH jet black RAL 9005	X2	211.93 €
N° 70637	KNX TH-UP Touch CH pure white RAL 9010	X2	243.70 €
N° 70638	KNX TH-UP Touch CH jet black RAL 9005	X2	243.70 €



KNX T-L-Pr-UP Touch CH Combined Presence Sensor

- Presence detector (PIR/passive infrared, range 5 m) as master or slave
- Brightness sensor with threshold values
- Temperature sensor with calculation of mixed values
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Supply: bus voltage
- 2 touch buttons (bus push button)
- 2 status LEDs (free assignable)
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- With installation instructions² and mounting adapter

N° 70851	KNX T-L-Pr-UP Touch CH pure white RAL 9010	X2	248.74 €
N° 70853	KNX T-L-Pr-UP Touch CH jet black RAL 9005	X2	248.74 €



KNX T-UP Touch CH and KNX T-UP gl CH

- Indoor sensor for temperature
- Threshold values, calculation of mixed values
- Logic gates (4 AND, 4 OR), actuating variable comparators
- PI controllers for heating / cooling
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- With installation instructions² and mounting adapter

KNX T-UP gl CH:

- Without display, without push buttons

KNX T-UP Touch CH:

- Display for measured values, bus data (e.g. date, time), mode, bargraph for target value change
- Touch buttons: Can be used as bus push buttons, for changing the setpoint temperature or for mode

N° 70635	KNX T-UP gl CH pure white RAL 9010	X2	201.68 €
N° 70636	KNX T-UP gl CH jet black RAL 9005	X2	201.68 €
N° 70633	KNX T-UP Touch CH pure white RAL 9010	X2	234.45 €
N° 70634	KNX T-UP Touch CH jet black RAL 9005	X2	234.45 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



Cala® KNX T 101/201/202 CH Temperature controller

- Temperature controller with PI controller for heating/cooling
- Integrated temperature sensor with calculation of mixed values (own/external value)
- 2 temperature limit values
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- With installation instructions² and mounting adapter

Cala KNX T 101 CH:

- Display of temperature, adjustment of target temperature via push buttons


Cala KNX T 201 Sunblind CH:

- Display of temperature, adjustment of target temperature via push buttons
- 2 touch surfaces for 1 drive (up/down with icon "Shading")
- Additional area function when touching two or more buttons simultaneously
- LEDs for optical feedback
- Logic gates (2 AND, 2 OR)

Cala KNX T 202 Sunblind CH:

- Display of temperature, adjustment of target temperature via push buttons
- 2x2 touch surfaces for 2 drives (each up/down with icon "Shading")
- Additional area function when touching two or more buttons simultaneously
- LEDs for optical feedback
- Logic gates (2 AND, 2 OR)

N° 70981	Cala KNX T 101 CH pure white RAL 9010	X2	169.75 €
N° 70983	Cala KNX T 101 CH jet black RAL 9005	X2	169.75 €
N° 70991	Cala KNX T 201 Sunblind CH pure white RAL 9010	X2	187.06 €
N° 70993	Cala KNX T 201 Sunblind CH jet black RAL 9005	X2	187.06 €
N° 71051	Cala KNX T 202 Sunblind CH pure white RAL 9010	X2	211.68 €
N° 71053	Cala KNX T 202 Sunblind CH jet black RAL 9005	X2	211.68 €

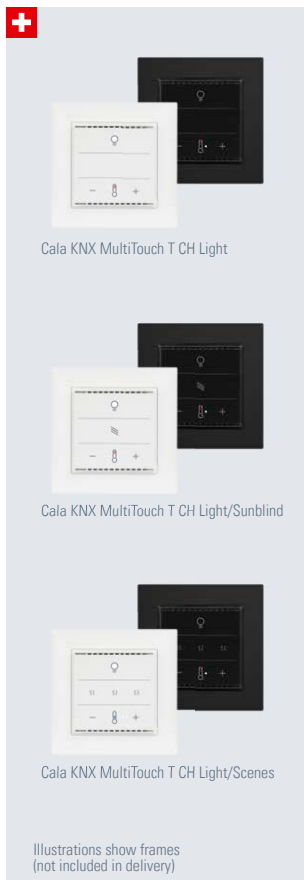

Cala® KNX MultiTouch T CH Push Button

- KNX push button with touch surface
- 3 operating zones arranged one above the other, printed with function icons for light (switch / dim), drive (shading), temperature. 3 touch surfaces per field, freely configurable
- LEDs for optical feedback
- Integrated temperature sensor with calculation of mixed values (own / external value)
- PI controller for heating / cooling
- Logic gates (4 AND, 4 OR)
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter

- With installation instructions² and mounting adapter

Cala KNX MultiTouch T Light:

- Operating zone for light (switching, brighter, darker)
- Free zone with 3 touch surfaces for individual assignment
- Operating zone for temperature control (warmer, cooler, changeover heating/cooling)

Cala KNX MultiTouch T Light/Sunblind:

- Operating zone for light (switching, brighter, darker)
- Operating zone for blinds/sunshades (up/down with short/long distinction, driving position)
- Operating zone for temperature control (warmer, cooler, changeover heating/cooling)

Cala KNX MultiTouch T Light/Scenes:

- Operating zone for light (switching, brighter, darker)
- Operating zone for temperature control (warmer, cooler, changeover heating/cooling)
- Operating zone for scene call and saving

N° 70951	Cala KNX MultiTouch T CH Light, pure white RAL 9010	X2	241.18 €
N° 70953	Cala KNX MultiTouch T CH Light, jet black RAL 9005	X2	241.18 €
N° 70891	Cala KNX MultiTouch T CH Light/Sunblind, pure white RAL 9010	X2	241.18 €
N° 70893	Cala KNX MultiTouch T CH Light/Sunblind, jet black RAL 9005	X2	241.18 €
N° 70961	Cala KNX MultiTouch T CH Light/Scenes, pure white RAL 9010	X2	241.18 €
N° 70963	Cala KNX MultiTouch T CH Light/Scenes, jet black RAL 9005	X2	241.18 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



Cala® KNX M-T CH Push Buttons

- KNX push button with touch surface
- LED for optical feedback in each push button
- Function of push button adjustable via ETS
- Integrated temperature sensor with calculation of mixed values (own / external value)
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- Supply: bus voltage
- Glass surface, available in 2 colours: pure white RAL 9010, jet black RAL 9005
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included
- Installation with 2 fastening clamps in adapter
- With installation instructions² and mounting adapter

Cala KNX M1-T CH:

- Single push button

- Configurable as switch, selector switch, dimmer, blind (position and slat up/stop OR down/stop), roller shutter (up/down/stop), awning (in/out/stop), window (close/open/stop), as 8- or 16-bit encoder or for scene recall/saving


Cala KNX M2-T CH:

- Double push button
- Configurable as switch, selector switch, dimmer, for operating drives, as 8- or 16-bit value encoder or for scene recall/saving
- Additional area function when touching both touch buttons

Cala KNX M4-T CH:

- Four-gang push button
- Configurable as switch, selector switch, dimmer, for operating drives, as 8- or 16-bit value encoder or for scene recall/saving
- Additional area function when touching three or more buttons simultaneously

N° 70861	Cala KNX M1-T CH pure white RAL 9010	X2	163.36 €
N° 70863	Cala KNX M1-T CH jet black RAL 9005	X2	163.36 €
N° 70871	Cala KNX M2-T CH pure white RAL 9010	X2	175.63 €
N° 70873	Cala KNX M2-T CH jet black RAL 9005	X2	175.63 €
N° 70881	Cala KNX M4-T CH pure white RAL 9010	X2	187.06 €
N° 70883	Cala KNX M4-T CH jet black RAL 9005	X2	187.06 €

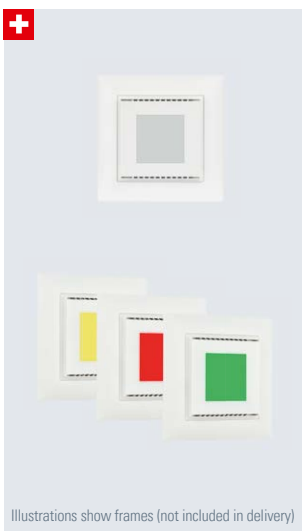

Cala® KNX IL CH Indicator Light

- Light signal with indicator function
- LED color field can glow/flash green, yellow or red or be switched off. Control via communication object (3× one-bit, scene, percent with threshold, two-byte floating point with threshold)
- Logic gates (4 AND, 4 OR), actuating variable comparator
- Configuration with ETS
- Supply: bus voltage
- For use in Swiss switch system with frame size 60 mm. Cannot be combined with other 60 mm systems! Frame and mounting plate not included

- Glass surface, colour: pure white RAL 9010
- With installation instructions² and support ring





Cala KNX IL CO2:

- Sensor for CO₂ concentration, value can be used for indicator light function
- 4 threshold values (adjustable per parameter or object), calculation of mixed values (own/external value)

N° 71381	Cala KNX IL CH pure white RAL 9010	X2	122.69 €
N° 71391	Cala KNX IL CO2 CH pure white RAL 9010	X2	242.86 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

KNX OPERATING UNITS WITH TOUCH DISPLAY

				
NAME	CASA CONNECT KNX	FABRO KNX	CORLO TOUCH KNX 5IN	CALA TOUCH KNX (3 Models)
Item number	71200	71270	70481, 70475	70800, 70802, 70810, 70812, 70820, 70822
Product info on ...	Page 39	Page 39	Page 39	Page 28
Display size	10.1" (1280 × 800 px)	7" (800 × 480 px)	5" (800 × 480 px)	2.3" (320 × 240 px)
Integrated sensors	–	–	–	T: Temp. TH: Temp./Humidity AQS/TH: CO ₂ /Temp./Humidity
Inputs	1× Ethernet (LAN)	–	4× Analog/Digital (binary data or temperature sensor T-NTC)	4× Analog/Digital (Binary data or temperature sensor T-NTC)
Additional communication options (additional to KNX)	LAN/WLAN for Internet (browser, remote diagnostics), WLAN for App	–	Model "WL" with WLAN interface	–
Manual operation on Display:				
Shading	✓	✓	✓	✓
Window	✓	✓	✓	✓
Heating/cooling	✓	✓	✓	✓
Ventilation	✓	✓	✓	–
Light	✓ RGB, tunable white	✓ RGB, tunable white	✓	✓ RGB, tunable white
Scenes	✓	✓	✓	✓
Operating elements & display surface individually assignable	✓	✓	✓	–
Display of operating elements selectable	–	✓	✓	✓
Individual designations (names)	✓	✓	✓	✓
Labelling with symbol	✓	✓	✓ internal library or own files	–
Screen saver	Off, Clock/Temperature, individual pictures, Off when room is dark	Off, Clock	Off, Clock, individual pictures, Off when room is dark	Off, Clock
Automatic functions:				
Shading	✓	–	✓	–
Window	✓	–	✓	–
Heating/Cooling	✓ control	–	✓ control	✓ control
Ventilation	✓	–	✓ control	T – TH, AQS/TH: ✓ control
Light	✓	–	✓	–
Alarm/Security	✓	–	✓	–
Automatic adjustable on the display	✓	–	✓	(only room setpoint temp., mode)
Further bus functions	–	Multifunction modules (computers), AND/OR logic	Limit values, AND/OR logic	Limit values, actuating variable comparators, multifunction modules (computers), AND/OR logic

KNX ROOM CONTROLLERS, CONTROL UNITS




Optional Accessories:

P04-KNX-GPS, N° 71230 p. 47

CasaConnect KNX Building Control

- Touch display for operating and setting the KNX automated areas in the building
- Start page with weather data display and individually adjustable start menu
- Menu for manual operation with scenes, group function, areas/floors, sliders for position and much more
- Automatic functions for shading (awnings, blinds, shutters), room climate (heating, cooling, ventilation) and light
- Management of sensor data, alarm messages, timer
- Basic setup of the functions via ETS, changing the automatic directly on the display
- SD card slot for images (slideshow) and backup of settings
- Network connection (LAN or WLAN, including Internet connection) for surfing, use of the CasaConnect-App on mobile devices, remote diagnostics
- Integrated speakers (4 tweeters, 1 full-range loudspeaker)
- Colour touch display 10.1 inches, real glass surface. Housing plastic
- Installation over a double switch box
- Approx. 279 × 185 (W × H, mm), mounting depth approx. 29 mm
- Colour black glossy
- Supply: 20...32 V DC
- Delivery with installation instructions²


N° 71200	CasaConnect KNX Building Control	X2	1,915.13 €
----------	---	----	-------------------

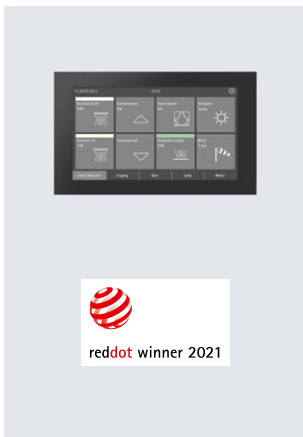

Fabro® KNX Operating Panel IP 66

- Touch operating panel for harsh environments and outdoor areas
- 5 display pages with 8 areas each
- Each area can be configured as a display or operating element. Objects from 1 bit (switching) to 14 bytes (text)
- Display of text, icon and colour per area, internal library with more than 40 icons
- 8 alarm input objects
- 8 multifunction modules (for calculation, conditions, conversion)
- Logic links (8 AND, 8 OR)
- KNX connection for data transmission
- Glass front in black with colour touch display 7 inch
- Housing IP 66, anodised aluminium
- Surface mounting, IP 66
- Dimensions approx. 191 × 111 (W × H, mm), mounting depth approx. 23 mm
- Supply: 20...32 V DC

N° 71270	Fabro KNX	X2	837.82 €
----------	------------------	----	-----------------

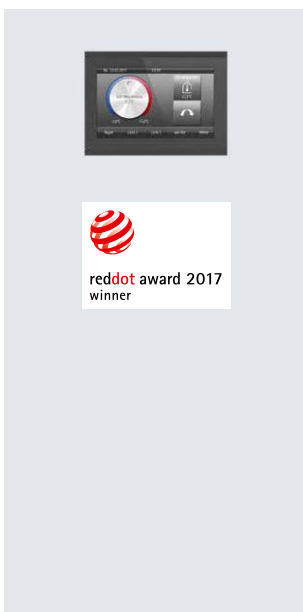

Corlo Touch KNX 5in Display for KNX

- Touch display usable as a switch, for the setting of automatic functions and display of information
- Touch sensitive glass surface, 5 inches
- 10 display pages can be configured individually, with areas for operation and display (e.g. switch, rocker, rotary control and value display)
- Includes large set of icons. You can load your own icons from Micro-SD Card
- Automatic functions for control of shading, room conditioning (heating, cooling, ventilation), lighting, adjustable on display
- Internal scene control, timer and wake-up function
- Logic gates (4 AND, 4 OR)
- Ambient lighting with individually variable colours (RGB)
- Proximity sensor allows switching on approach and fast activation of the display from standby mode
- Brightness sensor for automatic adaption of the display lighting
- 4 inputs (binary inputs or for temperatures sensor T-NTC, N° 30516), connection cable available separately
- Configuration with ETS
- Micro SD card slot (Image, Icons)
- Installation in a socket
- Total dimensions approx. 133 × 97 × 35 (W × H × D, mm), mounting depth approx. 20 mm
- Glass black, frame glossy black
- Supply: 21.6...26.4 V DC
- Delivery with installation instructions²
- **Corlo Touch KNX 5in:**
 - KNX connection for data communication
- **Corlo Touch KNX 5in WL:**
 - KNX connection
 - Connection for WLAN

Optional Accessories:

T-NTC, N° 30516 p. 60

N° 70481	Corlo Touch KNX 5in black/black	X2	773.11 €
N° 70475	Corlo Touch KNX 5in WL black/black	X2	850.42 €

KNX INDOOR SENSORS



Sewi KNX Indoor Sensor

- Indoor sensor with calculation of mixed values (own/ external value), threshold values (adjustable per parameter or object)
 - Temperature sensor, PI controllers for heating/cooling
 - Air humidity sensor, calculation of dew point
 - Actuating variable comparators
 - Configuration with ETS
 - Housing for surface mounting, IP 30, diameter approx. 105 mm, height 32 mm
 - Available in 2 colours: white (skirting RAL 9003, cover RAL 9002), jet black (RAL 9005)
 - Supply: bus voltage
 - Delivery with installation instructions²
- Sewi KNX AQS/TH-D:**
- CO₂ sensor, PI controllers for ventilation
 - PI controllers for ventilation (dehumidification / humidification)
 - Air pressure sensor
 - Monitoring of the comfort field (DIN 1946)
 - Summer compensation for cooling
 - Logic gates (8 AND, 8 OR), 8 multifunctional modules (for calculation, conditions, transition)
 - For wall/ceiling mounting
- Sewi KNX TH-L-Pr:**
- Brightness sensor
 - PI controllers for ventilation (dehumidification / humidification)
 - Presence detector PIR/passive infrared, angle of detection 94° × 82°, range 5 m
- Monitoring of the comfort field (DIN 1946)
 - Summer compensation for cooling
 - Logic gates (8 AND, 8 OR), 8 multifunctional modules (for calculation, conditions, transition)
 - For ceiling mounting
- Sewi KNX AQS/TH-D L-Pr:**
- CO₂ sensor, PI controllers for ventilation
 - PI controllers for ventilation (dehumidification / humidification)
 - Air pressure sensor
 - Brightness sensor
 - Presence detector PIR/passive infrared, angle of detection 94° × 82°, range 5 m
 - Monitoring of the comfort field (DIN 1946)
 - Summer compensation for cooling
 - Logic gates (8 AND, 8 OR), 8 multifunctional modules (for calculation, conditions, transition)
 - For ceiling mounting
- Sewi KNX AQS/TH L-Pr light:**
- CO₂ sensor, PI controllers for ventilation
 - Brightness sensor
 - Presence detector PIR/passive infrared, angle of detection 94° × 82°, range 5 m
 - Monitoring of the cooling medium temperature
 - Logic gates (2 AND, 2 OR), 2 multifunctional modules (for calculation, conditions, transition)
 - For ceiling mounting

N° 70397	Sewi KNX AQS/TH-D signal white RAL 9003 / grey white RAL 9002	X2	346.22 €
N° 70697	Sewi KNX AQS/TH-D jet black RAL 9005	X2	346.22 €
N° 70398	Sewi KNX TH-L-Pr signal white RAL 9003 / grey white RAL 9002	X2	272.27 €
N° 70698	Sewi KNX TH-L-Pr jet black RAL 9005	X2	272.27 €
N° 70399	Sewi KNX AQS/TH-D L-Pr signal white RAL 9003 / grey white RAL 9002	X2	380.67 €
N° 70699	Sewi KNX AQS/TH-D L-Pr jet black RAL 9005	X2	380.67 €
N° 71420	Sewi KNX AQS/TH L-Pr light signal white RAL 9003 / grey white RAL 9002	X2	354.62 €
N° 71422	Sewi KNX AQS/TH L-Pr light jet black RAL 9005	X2	354.62 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.



Intra-Sewi KNX Indoor Sensor

- Indoor sensor with calculation of mixed values (own/ external value), threshold values (adjustable per parameter or object)
- Logic gates (4 AND, 4 OR)
- Configuration with ETS
- Supply: bus voltage
- Installation in cavity wall / ceiling or flush-mounted socket, diameter approx. 80 mm, mounting depth approx. 5 mm
- Available in 2 colours: signal white (RAL 9003) or pure white (RAL 9010), deep black (RAL 9005)
- Delivery with installation instructions²

Intra-Sewi KNX T:

- Temperature sensor, PI controllers for heating / cooling
- For wall/ceiling mounting

Intra-Sewi KNX TH:

- Temperature sensor, PI controllers for heating / cooling
- Air humidity sensor, PI controllers for ventilation (dehumidification / humidification), calculation of dew point, monitoring of the comfort field (DIN 1946)

- Actuating variable comparators
- For wall / ceiling mounting


Intra-Sewi KNX TH-L-Pr:

- Temperature sensor, PI controllers for heating / cooling
- Air humidity sensor, PI controllers for ventilation (dehumidification / humidification), calculation of dew point, monitoring of the comfort field (DIN 1946)
- Actuating variable comparators
- Presence detector (PIR/passive infrared, angle of detection 94° × 82°, range 5 m) and brightness sensor, light control
- For ceiling mounting

Intra-Sewi KNX L-Pr:

- Presence detector (PIR/passive infrared, angle of detection 94° × 82°, range 5 m) and brightness sensor, light control
- For ceiling mounting

N° 70659	Intra-Sewi KNX T pure white RAL 9010	X2	160.50 €
N° 70665	Intra-Sewi KNX T jet black RAL 9005	X2	160.50 €
N° 70669	Intra-Sewi KNX TH pure white RAL 9010	X2	195.80 €
N° 70666	Intra-Sewi KNX TH jet black RAL 9005	X2	195.80 €
N° 70671	Intra-Sewi KNX L-Pr pure white RAL 9010	X2	195.80 €
N° 70672	Intra-Sewi KNX L-Pr jet black RAL 9005	X2	195.80 €
N° 70681	Intra-Sewi KNX TH-L-Pr pure white RAL 9010	X2	235.29 €
N° 70682	Intra-Sewi KNX TH-L-Pr jet black RAL 9005	X2	235.29 €

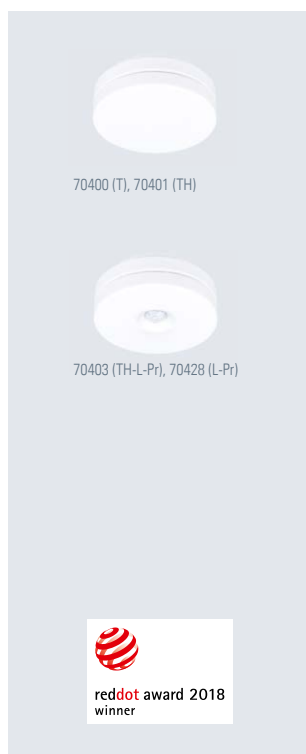

Mini-Sewi KNX Indoor Sensor

- Indoor sensor with calculation of mixed values (own/ external value), threshold values (adjustable per parameter or object)
- Logic gates (4 AND, 4 OR)
- Configuration with ETS
- Housing for surface mounting, IP 20, diameter approx. 51 mm, height 19 mm
- Supply: bus voltage
- Delivery with installation instructions²

Mini-Sewi KNX T:

- Temperature sensor, PI controllers for heating/cooling
- For wall / ceiling mounting

Mini-Sewi KNX TH:

- Temperature sensor, PI controllers for heating/cooling
- Air humidity sensor, PI controllers for ventilation (dehumidification / humidification), calculation of dew point, monitoring of the comfort field (DIN 1946)

- Actuating variable comparators
- For wall / ceiling mounting

Mini-Sewi KNX TH-L-Pr:

- Temperature sensor, PI controllers for heating/cooling
- Air humidity sensor, PI controllers for ventilation (dehumidification / humidification), calculation of dew point, monitoring of the comfort field (DIN 1946)
- Presence detector (PIR/passive infrared, angle of detection 94° × 82°, range 5 m) and brightness sensor, light control

- Actuating variable comparators

- For ceiling mounting

Mini-Sewi KNX L-Pr:

- Presence detector (PIR/passive infrared, angle of detection 94° × 82°, range 5 m) and brightness sensor, light control
- For ceiling mounting

N° 70400	Mini-Sewi KNX T	X2	144.54 €
N° 70401	Mini-Sewi KNX TH	X2	195.80 €
N° 70428	Mini-Sewi KNX L-Pr	X2	147.90 €
N° 70403	Mini-Sewi KNX TH-L-Pr	X2	216.81 €

² Manual with detailed description of the parameters can be downloaded from www.elsner-elektronik.de or ordered at cost as printed version.

**Optional Accessories:**

T-NTC-ST, N° 30513	p. 42
TH-UP basic	p. 42

KNX B8-TH Interface


- 8 binary inputs
- 2 sensor inputs:
 - 1× temperature / humidity sensor TH-UP basic N° 30525;
 - 1× temperature sensor T-NTC-ST N° 30513
- Threshold values, calculation of mixed values and dew point
- Logic gates (AND/OR)
- PI controller for heating / cooling (temperature) and ventilation (humidity)
- Configuration with ETS
- Approx. 38 × 49 × 18 (W × H × D, mm)
- Supply: bus voltage

N° 70249	KNX B8-TH	X2	144.54 €
----------	------------------	----	-----------------

**T-NTC-ST for KNX B8-TH**


- Temperature feed probe for indoor / outdoor use
- Measuring range -35...+100°C
- Length of sensor sleeve approx. 32 mm, Ø ca. 6 mm, cable length approx. 3 m

N° 30513	T-NTC-ST	X2	46.39 €
----------	-----------------	----	----------------

**Temperature/Humidity Sensor for KNX B8-TH**

- Temperature sensor/air humidity sensor
- Installation in a socket. Can be combined with switch systems with frame size 55 mm. Delivery without frame

N° 30525	TH-UP basic	X2	65.55 €
----------	--------------------	----	----------------

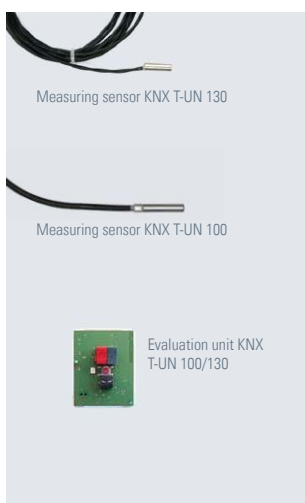**KNX T-UN All-purpose Temperature Sensor**

- Contacting/feed sensor for indoor and outdoor applications
- Set consisting of evaluation unit and measuring sensor
- Calculation of mixed values (own / external value), 4 threshold values (adjustable per parameter or object)
- PI controller for heating / cooling
- Logic gates (4 AND, 4 OR)
- Configuration with ETS
- Evaluation unit for installation in socket approx. 38 × 47 × 24 (W × H × D, mm)
- Cable length approx. 3 m
- Supply: bus voltage
- Delivery with installation instructions²
- Set KNX T-UN 130:**
 - With measuring sensor KNX T-UN 130, protection category IP 67, -30...+130°C
 - Length of sensor shell approx. 20 mm, Ø approx. 6 mm
- Set KNX T-UN 100:**
 - With measuring sensor KNX T-UN 100, protection category IP 43, -35...+100°C
 - Length of sensor shell approx. 32 mm, Ø approx. 6 mm

N° 70220	KNX T-UN 130	X2	218.49 €
----------	---------------------	----	-----------------

N° 70221	KNX T-UN 100	X2	190.76 €
----------	---------------------	----	-----------------

**Evaluation Unit KNX T6-UN-B4**

- Evaluation unit for up to 10 temperature sensors
- 6 temperature inputs for sensors T-100 or T-130 (sensors to be ordered separately)
- 4 analog / digital inputs for temperature sensors T-NTC, bus push button or similar
- Overall 6 threshold values
- Calculation of mixed values (own / external value)
- 6 PI controllers for heating / cooling
- Logic gates (4 AND, 4 OR)
- Configuration with ETS
- Installation in socket, approx. 38 × 47 × 32 (W × H × D, mm)
- Supply: bus voltage
- Delivery with installation instructions²

Optional Accessories:

T-NTC-ST, N° 30516	p. 60
T-100, T-130	p. 43

N° 70222	KNX T6-UN-B4	X2	241.18 €
----------	---------------------	----	-----------------

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.



T Temperature Sensors

- For KNX T6-UN-B4 (temperature sensor inputs) and as replacement for temperature sensors KNX T-UN
- Cable length approx. 3 m

T-100:

- Protection category IP 43, -35...+100°C
- Replacement sensor for KNX T-UN 100

- Length of sensor shell approx. 32 mm, Ø approx. 6 mm
- T-130:**
- Protection category IP 67, -30...+130°C
 - Replacement sensor for KNX T-UN 130
 - Length of sensor shell approx. 20 mm, Ø approx. 6 mm

N° 30517	T-100	X1	47.90 €
N° 30518	T-130	X1	73.70 €



Smoke Detector Salva KNX

- Smoke detector
- Local alarm signal and forwarding of the signal to KNX bus; local acknowledgement of the alarm
- Automatic self-test, signal when smoke chamber is dirty
- Logic gates (8 AND, 8 OR), 8 multifunctional modules (for calculation, conditions, transition)
- Configuration with ETS
- For indoor ceiling mounting, surface mounting, IP 40, Diameter approx. 113 mm, height 58 mm
- Power supply via battery (9 V); warning in case of low battery charge. Average service life approx. 10 years (typical) under normal conditions as per EN14604
- Delivery with installation instructions²

Salva KNX TH:

- Smoke detector for smoke and heat alarm
- Integrated sensors for temperature, humidity
- Calculation of mixed values and of the dewpoint
- Monitoring of the comfort field (DIN 1946)
- Threshold values (adjustable per parameter or object)
- PI controller for heating / cooling (temperature) and ventilation (dehum. / humidification)

Salva KNX basic:

- Smoke detector

Salva:

- Without KNX functions
- As replacement unit for 70405 / 70406 or for installation without KNX

N° 70406	Salva KNX TH	X2	293.28 €
N° 70405	Salva KNX basic	X2	268.07 €
N° 70409	Salva (replacement/without KNX)	X2	187.65 €



Leak KNX Leakage sensor for water / pipe break detection

- Detection of water at the probe
- Alarm signal to bus, text message is possible
- Probe: diameter: approx. 77 mm, cable length approx. 140 cm (plus cable grip and plugs)

Leak KNX 2.0:

- Set consists of evaluation unit and probe
- Probe with BNC plug, connection to evaluation unit
- Fault message for missing/defective probe

- Acoustic alarm signal
- Supply: 20...32 V DC
- Evaluation unit surface mounted, protection category IP 20, approx. 80 × 82 × 51 (W × H × D, mm)









Leak KNX basic:

- Probe with integrated bus coupling unit, KNX connection
- Supply: bus voltage

N° 70316	Leak KNX 2.0	X2	304.20 €
N° 70315	Leak KNX basic	X2	178.99 €

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

KNX WEATHER STATIONS with wind/rain sensors. Further outdoor sensors see page 49

								
NAME	SUNTRACER KNX pro	SUNTRACER KNX sl	SUNTRACER KNX-GPS	WINDANCER KNX-GPS	SUNTRACER KNX sl light	SUNTRACER KNX-GPS light	SUNTRACER KNX sl basic	SUNTRACER KNX basic
Item number	70900	70154	3093	71236	70155	3094	70156	3096
Product info on ...	Page 46	Page 46	Page 47	Page 48	Page 46	Page 48	Page 47	Page 48
Temperature measurement (threshold values)	✓(4)	✓(4)	✓(4)	✓(4)	✓(4)	✓(4)	✓(4)	✓(4)
Air humidity measurement, 4 threshold values, dew point calculation	✓	–	–	–	–	–	–	–
Wind speed measurement (threshold values)	electronic (4)	electronic (4)	electronic (3)	mechanical (3)	electronic (4)	electronic (3)	electronic (4)	electronic (3)
Live monitoring (via wind)	✓	✓	–	–	✓	–	✓	–
Wind direction measurement, 4 areas	✓	–	–	–	–	–	–	–
Brightness measurement (threshold values twilight/day)	✓(4/8)	✓(4/4)	✓(3/4)	✓(3/4)	✓(4/4)	✓(3/3)	✓(4/4)	✓(3/3)
Precipitation recognition	✓	✓	✓	✓	✓	✓	✓	✓
Air pressure measurement, 4 threshold values	✓	✓	–	–	–	–	–	–
Date/Time	✓(GPS)	✓(GPS)	✓(GPS)	✓(GPS)	✓(GPS)	✓(GPS)	–	–
Output of the location coordinates	✓	✓	✓	✓	✓	–	–	–
Integration of further KNX sensors in façade automation (indoor/outdoor temperature, brightness, pyranometer, wind)	✓	✓	–	–	✓	–	–	–
Calculation of the position of the sun	✓	✓	✓	✓	✓	✓	–	–
Shading control (number of façades)	✓(12)	✓(8)	✓(6)	✓(8)	✓(5)	✓(5)	–	–
Slat tracking, Shadow edge function	✓	✓	✓	✓	–	–	–	–
Delay times (shading, limit values) can be set via objects	✓	✓	✓	✓	✓	–	✓	–
Blocking function for linkage and threshold value outputs	✓	✓	✓	✓	✓	–	✓	–
Façade status output (plain text, 14 bytes), simulation for commissioning	✓	✓	–	–	✓	–	–	–
Week/calendar timer	✓	✓	✓	✓	✓	✓	–	–
AND/OR logic, 4 inputs each (1-bit objects)	8/8 (16)	8/8 (16)	8/8 (16)	6/6 (16)	8/8 (16)	8/8 (8)	8/8 (16)	8/8 (8)
8 multifunctional modules (calculator)	✓	✓	–	–	✓	–	✓	–
Heat protection function (at high outside temperatures)	✓	✓	✓	✓	✓	–	✓	–
Frost protection function (for precipitation at low outside temperatures)	✓	✓	–	–	✓	–	✓	–
Summer compensation for cooling systems	✓	✓	–	–	✓	–	–	–

KNX WEATHER STATIONS



suntracer® KNX pro Weather Station

- Wind speed sensor, wind direction sensor
- Heated precipitation sensor
- Brightness sensors for east, south and west sun, daylight (sky sensor), twilight detection
- Temperature sensor, humidity sensor (relative, absolute), air pressure sensor
- Calculation of dew point, monitoring of the comfort field (DIN 1946), summer compensation for cooling
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Threshold values, adjustable per parameter or object
- Shading control for 12 fronts with tracking of the slats and shadow edge, frost protection
- Calendar time switch (4 annual terms with 2 daily periods), week time switch (24 periods)
- 8 multifunctional modules (for calculation, conditions, transition), logic gates (8 AND, 8 OR)
- Configuration with ETS
- For pole mounting, IP 44, approx. 255 × 140 × 274 (W × H × D, mm, without mounting)
- Supply: 24 V DC ±10%
- Delivery with 24 V DC power supply unit PS2500 (N° 20206), mounting pole 50 cm with mounting accessories and installation instructions²

N° 70900 **Suntracer KNX pro** X2 **1,968.07 €**



suntracer® KNX sl Weather Station

- With wind speed sensor, heated precipitation sensor, brightness sensor, temperature sensor, air pressure sensor
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Threshold values, adjustable per parameter or object
- Shading control for 8 fronts with tracking of the slats and shadow edge and with frost protection
- 8 multifunctional modules (for calculation, conditions, transition)
- Calendar time switch (4 annual terms with 2 daily periods), week time switch (24 periods)
- Summer compensation for cooling
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm), incl. mounting accessories (screws, mast clamp)
- Supply: 20...30 V DC
- Delivery with installation instructions² and Mounting Arm Fix

N° 70154 **Suntracer KNX sl with Mounting Arm Fix** X2 **1,111.93 €**

Optional Accessories:

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60



suntracer® KNX sl light Weather Station

- With wind speed sensor, heated precipitation sensor, brightness sensor, temperature sensor, air pressure sensor
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Threshold values, adjustable per parameter or object
- Shading control for 5 fronts (without tracking of the slats and shadow edge), frost protection for shading elements
- Calendar time switch (4 annual terms with 2 daily periods), week time switch (24 periods)
- 8 multifunctional modules (for calculation, conditions, transition)
- Summer compensation for cooling
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm), incl. mounting accessories (screws, mast clamp)
- Supply: 20...30 V DC
- Delivery with installation instructions² and Mounting Arm Fix

N° 70155 **Suntracer KNX sl light with Mounting Arm Fix** X2 **933.61 €**

Optional Accessories:

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60



Focus Open 2014
Special Mention

Awards for Suntracer KNX sl

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

**Optional Accessories:**

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

suntraccer® KNX sl basic Weather Station

- With wind speed sensor, heated precipitation sensor, 3 brightness sensors (rotated 90° each), outdoor temperature sensor
- Threshold values, adjustable per parameter or object
- Frost protection for shading elements
- 8 multifunctional modules (for calculation, conditions, transition)
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm), incl. mounting accessories (screws, mast clamp)
- Supply: 20...30 V DC
- Delivery with installation instructions² and Mounting Arm Fix

N° 70156	Suntraccer KNX sl basic with Mounting Arm Fix	X2	654.62 €
----------	--	----	-----------------

**Optional Accessories:**

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

P04-KNX-GPS Weather Station

- With wind speed sensor, heated precipitation sensor, brightness sensors (output of the maximum value of 3 sensors, sensors are rotated 90° each), outdoor temperature sensor
- GPS receiver. Output of local time and position coordinates
- Configuration with ETS
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm), incl. mounting accessories (screws, mast clamp)
- Supply: 20...30 V DC
- Delivery with installation instructions² and Mounting Arm Fix

N° 71230	P04-KNX-GPS with Mounting Arm Fix	X2	605.88 €
----------	--	----	-----------------

KNX W sl
KNX RW sl
KNX LW sl

KNX R sl

KNX sl Weather Sensors

- Configuration with ETS
- For wall / pole mounting, IP 44, approx. 62 × 71 × 152 (W × H × D, mm), incl. mounting accessories (screws, mast clamp)
- Supply: 20...30 V DC
- Delivery with installation instructions²
- Threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR)
- 8 multifunctional modules (for calculation, conditions, transition)

KNX W sl:

- Wind speed sensor
- Threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR)
- 8 multifunctional modules (for calculation, conditions, transition)

KNX RW sl:

- Rain/wind speed sensor

- Threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR)
- 8 multifunctional modules (for calculation, conditions, transition)

KNX LW sl:

- Brightness/wind speed sensor
- Threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR)
- 8 multifunctional modules (for calculation, conditions, transition)

KNX R sl:

- Heated precipitation sensor
- Logic gates (4 AND, 4 OR)
- Approx. 62 × 55 × 152 (W × H × D, mm)

N° 70158	KNX W sl	X2	376.47 €
N° 70162	KNX RW sl	X2	443.70 €
N° 70164	KNX LW sl	X2	443.70 €
N° 70165	KNX R sl	X2	147.90 €

**Optional Accessories:**

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

suntraccer® KNX GPS Weather Station

- With wind speed sensor, heated precipitation sensor (1.2 W), brightness sensor, outdoor temperature sensor
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Threshold values, adjustable per parameter or object
- Shading control for 6 fronts with tracking of the slats and shadow edge
- Calendar time switch, week time switch
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall / pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm), incl. 2 straps for pole mounting
- Supply: 20...30 V DC

N° 3093	Suntraccer KNX-GPS	X2	1,056.30 €
---------	---------------------------	----	-------------------

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

**Optional Accessories:**

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

suntracer® KNX GPS light Weather Station

- With wind speed sensor, heated precipitation sensor (1.2 W), brightness sensor, outdoor temperature sensor
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Threshold values, adjustable per parameter or object
- Shading control for 5 fronts (without tracking of the slats and shadow edge)
- Calendar time switch, week time switch
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall / pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm), incl. 2 straps for pole mounting
- Supply: Available for 230 V AC or for 20...30 V DC

N° 3094	Suntracer KNX-GPS light 20...30 V DC	X2	888.82 €
---------	---	----	-----------------

**Optional Accessories:**

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

suntracer® KNX basic Weather Station

- With wind speed sensor, heated precipitation sensor (1.2 W), brightness sensor, outdoor temperature sensor
- Threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall/pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm), incl. 2 straps for pole mounting
- Supply: 20...30 V DC

N° 3096	Suntracer KNX basic 20...30 V DC	X2	611.09 €
---------	---	----	-----------------



KNX W 20-30 V DC

KNX RW 20-30 V DC

KNX LW 20-30 V DC

KNX L

Optional Accessories:

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

KNX Weather Sensors

- Threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR)
- Configuration with ETS
- For wall / pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm), incl. 2 straps for pole mounting
- Delivery with installation instructions²

KNX L:

- Brightness sensor

KNX W:

- Wind speed sensor

KNX RW:

- Rain / wind speed sensor

KNX LW:

- Brightness / wind speed sensor

N° 70119	KNX L power supply via bus	X2	155.46 €
N° 70123	KNX W 20...30 V DC	X2	376.47 €
N° 70127	KNX RW 20...30 V DC	X2	443.70 €
N° 70129	KNX LW 20...30 V DC	X2	443.70 €

**Optional Accessories:**

24 V DC power supply units	p. 19
KNX PS640	p. 55
Mounting accessories	p. 60

Windancer KNX Wetterstationen

- With wind speed sensor, heated precipitation sensor, temperature sensor
- Threshold values, adjustable per parameter or object
- Logic gates (6 AND, 6 OR)
- Configuration with ETS
- For wall mounting, IP 44, approx. 113 × 101 × 225 (W × H × D, mm), incl. mounting screws
- Pole mounting with N° 30129 Fix P (optional)
- Auxiliary voltage: 24 V DC
- Delivery with installation instructions²

Windancer KNX:

- 3 brightness sensors for east, south and west sun

Windancer KNX-GPS:

- 3 brightness sensors, use of current maximum value
- GPS receiver. Output of local time and position coordinates, calculation of the position of the sun
- Shading control for 8 fronts with tracking of the slats and shadow edge
- Calendar time switch, week time switch

N° 71235	Windancer KNX	X2	478.15 €
N° 71236	Windancer KNX-GPS	X2	584.03 €

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

NEW



BX8 KNX Extension for shading control

- Shading control for 8 fronts with tracking of the slats and shadow edge
- Considers wind speed, precipitation, brightness, position of the sun, indoor and outdoor temperature, global radiation
- Rain, wind, frost and heat protection
- Calendar timer (4 seasons with 2 time periods per day), weekly timer (24 time periods), event timer (8 events)
- 9 digital inputs
- Extensive status output (editable texts)
- Configuration with ETS
- Installation on DIN rail, 3 units, approx. 53 × 88 × 60 (W × H × D, mm)
- Supply: bus voltage
- Delivery with installation instructions²

N° 71240

BX8 KNX NEW

X2

502,52 €

KNX OUTDOOR SENSORS Weather stations with wind/rain sensors see page 44

						
NAME	VARI KNX 3L-T	VARI KNX 3L-TH	VARI KNX 3L-TH-D-GPS	KNX PY	KNX T-AP	KNX TH65-AP
Item number	70383	70384	70390	70157	70121	70184
Product info on ...	Page 50	Page 50	Page 50	Page 50	Page 50	Page 51
Temperature measurement, 4 threshold values	✓	✓	✓	–	✓	✓
Air humidity measurement (threshold values), dew point calculation	–	✓(4)	✓(4)	–	–	✓(2)
Brightness measurement (threshold values twilight/day)	✓(4/4)	✓(4/4)	✓(4/4)	–	–	–
Global radiation measurement (solar intensity), 4 threshold values	–	–	–	✓	–	–
Air pressure measurement, 4 threshold values	–	–	✓	–	–	–
Calculation of the position of the sun	–	–	✓	–	–	–
Blocking function for linkage and threshold value outputs	✓	✓	✓	–	–	–
Calendar time switch, week time switch, date/time	–	–	✓	–	–	–
Output of position coordinates	–	–	✓	–	–	–
AND and OR logic gates, 4 inputs each (number of 1-bit objects)	8 AND, 8 OR (16)	8 AND, 8 OR (16)	8 AND, 8 OR (16)	2 AND, 2 OR (8)	4 AND, 4 OR (8)	4 AND, 4 OR (8)
8 multifunctional modules (calculators)	✓	✓	✓	–	–	–
Temperature controller (heating, cooling)	✓	✓	✓	–	✓	✓
Humidity controller (ventilation)	–	✓	✓	–	–	✓
Summer compensation for cooling	✓	✓	✓	–	–	–

KNX OUTDOOR SENSORS



Optional Accessory:

Mounting accessories p. 60

Vari KNX Outdoor Sensors

- Sensors for outdoor and indoor application
- Calculation of mixed values (own / external value), threshold values, adjustable per parameter or object
- Logic gates (8 AND, 8 OR), 8 multifunctional modules (for calculation, conditions, transition)
- Configuration with ETS
- For wall/pole mounting, IP 44, approx. 65 × 80 × 30 (W × H × D, mm), incl. mounting accessories (screws, mounting strap)
- Supply: bus voltage
- Delivery with installation instructions²

Vari KNX 3L-T:

- 3 Helligkeitssensoren, jeweils 90° versetzt
- Temperature sensor, PI controllers for heating / cooling
- Summer compensation for cooling

Vari KNX 3L-TH:

- 3 brightness sensors, rotated 90° each
- Temperature sensor, PI controllers for heating / cooling

- Air humidity sensor, PI controllers for ventilation (dehumidification / humidification), calculation of dew point, monitoring of the comfort field (DIN 1946)
- Summer compensation for cooling
- Actuating variable comparators

Vari KNX 3L-TH-D GPS:

- 3 brightness sensors, rotated 90° each
- Temperature sensor, PI controllers for heating / cooling
- Air humidity sensor, PI controllers for ventilation (dehumidification / humidification), calculation of dew point, monitoring of the comfort field (DIN 1946)
- Air pressure sensor
- Summer compensation for cooling
- Actuating variable comparators
- GPS receiver: output of current time and position coordinates, calculation of the solar position
- Calendar time switch (4 annual terms with 2 daily periods), week time switch (24 periods)

N° 70383	Vari KNX 3L-T	X2	337.90 €
N° 70384	Vari KNX 3L-TH	X2	390.76 €
N° 70390	Vari KNX 3L-TH-D GPS	X2	507.56 €



Optional Accessory:

Mounting accessories p. 60

KNX PY Pyranometer

- Measures the global irradiance (sun intensity), output of radiation intensity in watts per squaremeter (0...2500 W/m²) or kilowatt hours per squaremeter (0...2196 kWh/m²)
- 4 threshold values, adjustable per parameter or object
- Logic gates (2 AND, 2 OR)
- Configuration with ETS
- For wall / pole mounting, housing for surface mounting, IP 44, approx. 96 × 77 × 118 (W × H × D, mm), incl. 2 straps for pole mounting
- Supply: bus voltage
- Delivery with installation instructions²

N° 70157	KNX PY	X2	400.00 €
----------	---------------	----	-----------------



KNX T-AP Temperature Sensor

- Temperature sensor for indoor and outdoor applications
- Calculation of mixed values (own / external value), 4 threshold values, adjustable per parameter or object
- Logic gates (4 AND, 4 OR)
- PI Controller for heating / cooling
- Configuration with ETS
- Housing for surface mounting, IP 65, grey, approx. 65 × 93 × 38 (W × H × D, mm)
- Supply: bus voltage
- Delivery with installation instructions²

N° 70121	KNX T-AP	X2	209.24 €
----------	-----------------	----	-----------------


² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.



KNX TH65-AP Thermo-Hygrometer

- Sensor for indoor and outdoor applications for temperature and humidity (relative, absolute)
- Calculation of mixed values (own / external value), calculation of dew point. 7 threshold values, adjustable per parameter or object
- Monitoring of the comfort field (DIN 1946)
- Logic gates (4 AND, 4 OR)
- PI controllers for heating / cooling (temperature) and ventilation (dehumidification / humidification)
- Configuration with ETS
- Housing for surface mounting, IP 65, grey, approx. 65 × 93 × 38 (W × H × D, mm)
- Supply: bus voltage
- Delivery with installation instructions²

N° 70184	KNX TH65-AP	X2	272.27 €
----------	--------------------	----	-----------------

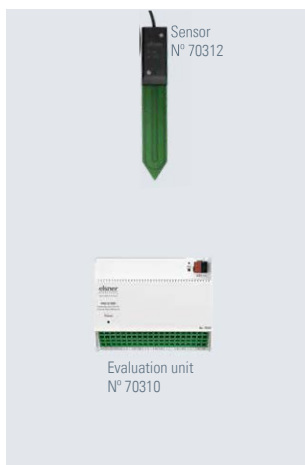

KNX I4-ERD Evaluation Unit for Ground Sensors TH-ERD

- Evaluation unit for monitoring of ground temperature/humidity for up to 4 ground sensors (please order sensors separately).
 - Configuration with ETS
 - Delivery with installation instructions²
- KNX I4-ERD Evaluation Unit:**
- 2 threshold values for temperature / humidity per sensor
 - 6 units series installation housing, approx. 107 × 88 × 60 (W × H × D, mm)
 - Supply: 230 V AC, 50 Hz
- TH-ERD Ground temperature / humidity sensor:**
- Temperature measurement (-55...125°C)
 - Moisture measurement (possible measurement in a temperature range of -10...70°C)
 - Approx. 32 × 220 × 10 (W × H × D, mm), cable length approx. 10 m, may be extended to 100 m

N° 70310	KNX I4-ERD evaluation unit	X2	343.70 €
N° 70312	TH-ERD ground temperature/humidity sensor	X2	240.34 €




KNX S0250 Tank Sensors for KNX

- For measurement of the capacity of liquids in tanks and for distance measurement
 - Threshold values, adjustable per parameter or object
 - Set consisting of evaluation unit and ultrasonic probe
 - Ultrasound probe with measurement range 12 to 250 cm. Dimensions: Ø approx. 60 mm, height approx. 45 mm, 1½" thread, incl. 10 m cable
 - Suitable for water and heating oil
 - Configuration with ETS
 - Delivery with installation instructions²
- KNX S0250 basic:**
- Evaluation unit for series installation, 3 units, approx. 53 × 88 × 60 (W × H × D, mm)
 - Supply: bus voltage
- KNX S0250:**
- Evaluation unit with display and push buttons, for series installation, 7 units, approx. 123 × 89 × 61 (W × H × D, mm)
 - 2 additional output relays
 - Supply: 230 V AC, 50 Hz

N° 70153	KNX S0250 basic Evaluation unit with probe	X2	380.67 €
N° 70151	KNX S0250 Evaluation unit with probe	X2	493.28 €

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

KNX ACTUATORS – FOR LIGHTING (DALI)

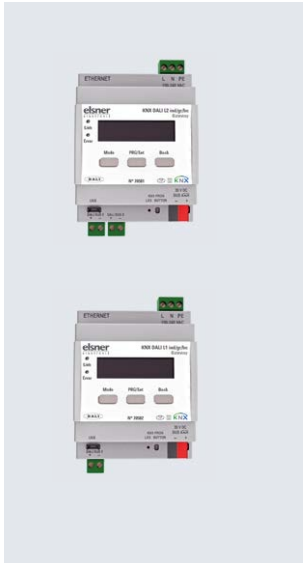

KNX DALI L1 & L2 ind/gr/bc Interface

- For DALI lighting control (DALI-2)
 - Individual control, group control (also combined) or broadcast control
 - Brightness control, control of color temperature and RGB and RGBW color values
 - Status messages via two-line text display and KNX bus
 - Emergency lighting tests via KNX line
 - Configuration with ETS
 - Ethernet port for network settings, language, statistics, firmware update via embedded web interface
 - Micro USB port for system access (e.g. software update)
- Supply: 110...240 V AC
 - Internal DALI power supply
 - Installation on DIN rail, 4 units, approx. 70 × 90 × 64.5 (W × H × D, mm)
 - Delivery with installation instructions²

KNX DALI L1 ind/gr/bc:

- 1 output for 64 individual devices or 16 groups
- 16 scenes

KNX DALI L2 ind/gr/bc:

- 2 output for 2×64 individual devices or 2×16 groups
- 2×16 scenes

N° 70582	KNX DALI L1 ind/gr/bc	X2	308.40 €
N° 70581	KNX DALI L2 ind/gr/bc	X2	417.65 €



KNX DALI L1 & L2 ind/gr/bc sec Interface

- For DALI lighting control (DALI-2)
 - Individual control, group control (also combined) or broadcast control
 - Scene control of up to 16 DALI scenes
 - Control of DALI DT8 lights with Colour Temperature (Tunable White) and HCL (Human Centric Lighting)
 - Control of DALI DT8 lights with Colour Control for RGB(W) and HSV(W) applications and Colour Transition
 - DALI-2 multimaster device (in accordance with EN62386-103 ed2), support of DALI-2 control devices
 - KNX Secure product with maximum product flexibility in KNX Secure installations
 - Option to update, even in existing systems, with the ETS Service App
- Configuration via ETS, DALI configuration via DCA in the ETS
 - Supply: 110...240 V AC, 110...240 V DC
 - Internal DALI power supply
 - Installation on DIN rail, 4 units, approx. 70 × 90 × 64.5 (W × H × D, mm)
 - Delivery with installation instructions²

KNX DALI L1 ind/gr/bc sec:

- 1 output for 64 individual devices or 32 groups

KNX DALI L2 ind/gr/bc sec:

- 2 output for 2×64 individual devices or 2×32 groups

N° 70584	KNX DALI L1 ind/gr/bc NEW	X2	445.38 €
N° 70583	KNX DALI L2 ind/gr/bc NEW	X2	565.55 €

KNX ACTUATORS – FOR DOORS



Control Module for Door Drives KNX A3-B2

- 3 outputs for control of a door (defined open / close / stop, impulse or deadman mode)
 - 2 binary inputs (for status query or as a bus push button)
 - Connection via included breakout cable
- Installation in a flush mounted socket, approx. 38 × 47 × 29 (W × H × D, mm)
 - Configuration with ETS
 - Supply: bus voltage
 - Delivery with installation instructions²

N° 70391	KNX A3-B2	X2	170.59 €
----------	------------------	----	-----------------

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

KNX ACTUATORS – FOR CONSUMERS




KNX R1-B4 compact 16 A Switching Actuator

- Potential-free relay output for 1 consumer load (on / off); maximum 270 V AC/30 V DC, 16 A
- Timer functions: On / off delay, staircase timer with adjustable prewarning
- 8 channel scene control
- 4 digital inputs
- Configuration with ETS
- For installation, e.g. in socket. Diameter approx. 52 mm, depth approx. 24 mm
- Supply: bus voltage
- Delivery with connection line for the digital inputs and installation instructions²

N° 70574	KNX R1-B4 compact 16 A	X2	173.11 €
----------	-------------------------------	----	-----------------


KNX ACTUATORS – FOR DRIVES OR CONSUMERS



KNX S1R-B4 compact Multifunctional Actuator

- Potential-free relay output for 1 drive (1x up / down) or two consumers (2x on / off); maximum 270 V AC / 30 V DC, 5 A
- Shading/window automation; movement restrictions
- 16 channel scene control
- 4 digital inputs
- Configuration with ETS
- For installation, e.g. in socket. Diameter approx. 52 mm, depth approx. 24 mm
- Supply: bus voltage
- Delivery with connection line for the digital inputs and installation instructions²

N° 70550	KNX S1R-B4 compact	X2	158.82 €
----------	---------------------------	----	-----------------

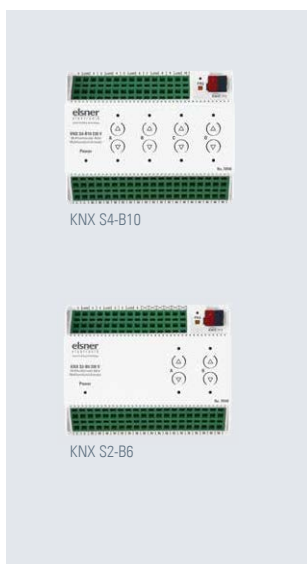





KNX S4-B10, KNX S2-B6 Multifunctional Actuators

- Outputs 230 V AC, each for one drive (1x up / down) or two consumers (2x on / off)
 - Motor run time variable by ETS parameters or active current metering
 - Automatic functions for shading, window; movement restrictions
 - 16 channel scene control
 - Supply: 230 V AC, 50 Hz
 - Configuration with ETS
 - Delivery with installation instructions²
 - 10 binary inputs
 - Installation on DIN, rail with integrated push buttons and LEDs, 6 units, approx. 107 × 88 × 60 (W × H × D, mm)
- KNX S2-B6 230 V:**
- 2 multifunctional outputs 230 V AC (2 drives / 4 consumers)
 - 6 binary inputs
 - Installation on DIN, rail with integrated push buttons and LEDs, 6 units, approx. 107 × 88 × 60 (W × H × D, mm)
- KNX S4-B10 230 V:**
- 4 multifunctional outputs 230 V AC (4 drives / 8 consumers)

N° 70546	KNX S4-B10 230 V	X2	490.76 €
N° 70548	KNX S2-B6 230 V	X2	308.40 €


² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

KNX ACTUATORS for drives or multifunctional

				
NAME	KNX S4-B10 230 V	KNX S2-B6 230 V	KNX S4-B12 24 V	KNX S1R-B4 compact
Item number	70546	70548	70533	70550
Product info on ...	Page 53	Page 53	Page 55	Page 53
Housing	DIN-rail 6U	DIN-rail 6U	DIN-rail 6U	in-wall
Pairs of buttons	4	2	4	–
Supply	230 V AC	230 V AC	20...32 V DC	Bus
Channels	4	2	4	1
Multifunctional (per 1x up/down or 2x off/on)	✓	✓	only up/down	✓
Output voltage	230 V AC	230 V AC	12...24 V DC pole reversal	potential-free
Outputs switch	mechanical	mechanical	mechanical	mechanical
Separate voltage feed per channel	–	–	✓	–
Digital inputs	10	6	12	4
Digital/analogue inputs	–	–	–	–
Input voltage	6...80 V DC, 6...240 V AC	6...80 V DC, 6...240 V AC	6...24 V DC	–
Drives: runtime measurement	✓*	✓*	✓*	✓*
Dead time (also automatically)	✓	✓	✓	✓
Position feedback, position storage	✓	✓	✓	✓
Locking (Master/Slave)	✓	✓	✓	✓
Priority for safety functions, Priority manual/automatic adjustable	✓	✓	✓	✓
Safety objects per channel, with movement position	5	5	5	5
Short term restriction (movement command blocked)	✓	✓	✓	✓
Movement restriction	2	2	–	–
Behaviour adjustable for bus voltage failure/recovery	✓	✓	✓	✓
Automatic Shading, slat tracking	✓	✓	✓	✓
Step command for slat turning	✓	✓	✓	✓
Window automation	✓	✓	✓	✓
Scenes	16	16	16	16
Temperature thresholds	–	–	–	–
Automatic staircase lighting system	✓	✓	–	✓

* consider minimum current

KNX ACTUATORS – FOR 24 V DC DRIVES



KNX S4-B12 24V KNX Actuator

- 4 outputs with polarity change (up / down) for motors 12 - 24 V DC, separate voltage supply per channel
- Motor run time variable by ETS parameters or active current metering
- Automatic functions for shading, window; movement restrictions
- 16 channel scene control
- 12 binary inputs
- Installation on DIN, rail with integrated push buttons and LEDs, 6 units, approx. 107 × 88 × 60 (W × H × D, mm)
- Supply: 20...32 V DC (external power supply necessary)
- Configuration with ETS
- Delivery with installation instructions²

N° 70533	KNX S4-B12 24 V	X2	490.76 €
----------	------------------------	----	-----------------

KNX ACTUATORS – FOR DRIVES WITH 3 LIMIT SWITCHES




KNX S4-B12 DES Actuator for drives with 3 limit switches

- 4 outputs 230 V AC, each for 1 drive (up / down) with 3 limit switches (DES)
- 12 binary inputs
- Internal automatic functions for shading; movement restrictions
- 16 channel scene control
- Configuration with ETS
- Operating voltage: 230 V AC, 50 Hz
- Installation on DIN, rail with integrated push buttons and LEDs, 6 units, approx. 107 × 88 × 60 (W × H × D, mm)
- Delivery with installation instructions²

N° 70535	KNX S4-B12 DES	X2	490.76 €
----------	-----------------------	----	-----------------

KNX POWER SUPPLY UNITS



KNX PS640 Power Supply Unit for KNX

- 1 output for KNX bus voltage, output current of max. 640 mA, short-circuit proof (throttled)
- 1 output for 24 V DC, output current of maximum 150 mA (not throttled)
- Display of short circuit, overvoltage, overload, excessive temperature, current consumption
- Reset of the connected bus participants at the device
- Installation on DIN rail with display and push buttons, 7 units, approx. 123 × 89 × 61 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

N° 70140	KNX PS640	X2	443.70 €
----------	------------------	----	-----------------



KNX PS640+ Power Supply Unit for KNX

- 1 output for KNX bus voltage, output current of max. 640 mA, short-circuit proof (throttled)
- 1 output for 24 V DC, output current of maximum 150 mA (not throttled)
- Display of short circuit, overvoltage, overload, excessive temperature, current consumption
- Storage of malfunction messages
- Reset of the connected bus participants at the device
- Bus connector for data transfer to line/main line/area
- With bus functions (transfer of malfunction messages / operating; time / period reset via the bus)
- Installation on DIN rail with display and push buttons, 7 units, approx. 123 × 89 × 61 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

N° 70141	KNX PS640+ with bus functions	X2	536.89 €
----------	--------------------------------------	----	-----------------

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.



KNX PS640 4U Power Supply Unit for KNX

- 1 output for KNX bus voltage, throttled, output current of max. 640 mA
- 1 output for 30 V DC, not throttled, max. 640 mA
- Overload and short circuit proof
- Reset of the bus line via button
- LEDs display status information
- Power loss < 5 W
- Installation on DIN rail 4 units, approx. 94 × 72 × 71 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

N° 70146 **KNX PS640 4U** X2 **280.67 €**



KNX PS640-IP 2U Intelligent Power Supply Unit for KNX

- 1 output for KNX bus voltage, throttled, output current of max. 640 mA
- 1 output for 30 V DC, not throttled, max. 640 mA
- Overload and short circuit proof
- Diagnostic functions: Transmission of measured values (output voltage, current, temperature, bus load), counter readings, duration of events (overload, short circuit, KNX bus/device restart, operating time, duration of bus load disconnection, number of alarms) to the bus
- Configurable alarm levels, alarm group objects
- Reset of the bus line via button or remote
- Multi-coloured LEDs display status information
- Power loss < 5 W
- Installation on DIN rail 2 units, approx. 94 × 36 × 71 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz

N° 70147 **KNX PS640-IP 2U** X2 **450.42 €**

KNX INTERFACES, COUPLERS



KNX B4 Universal Interface

- 4 binary inputs integrate conventional push-buttons and other contacts into the KNX system
- Functions: Drive control (1 or 2 buttons), dimming, switching, sending values, counter reset, counter limit value, scenes
- Distinction between short/long command
- Installation in socket, e. g. behind a switch, dimensions approx. 42 × 43 × 11 (W × H × D mm)
- Delivery with installation instructions²

N° 70251 **KNX B4 Universal** X2 **102.52 €**



KNX CP TP Area and Line Coupler

- Data exchange between a KNX TP main and sub line.
- Routing filter for group and individual telegrams (incl. button for temporary deactivation), supports long telegrams
- Suppression of configuration from the sub line to the main line
- Use as line amplifier: extension of a KNX TP line by one segment
- Functions for troubleshooting, quick commissioning and avoidance of unnecessary telegram traffic
- Integrated ACK generator
- Multi-coloured LEDs display status information
- Installation on DIN rail 2 units, approx. 90 × 36 × 71 (W × H × D, mm)
- Supply: bus voltage
- Delivery with installation instructions²

N° 70148 **KNX CP TP** X2 **365.55 €**

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.



KNX CP IP Router with Routing and Tunneling Interface

- KNXnet/IP routing
- Routing filter for group and individual telegrams (incl. button for temporary deactivation), supports long telegrams
- Suppression of configuration from the sub line to the main line
- Functions for troubleshooting, quick commissioning and avoidance of unnecessary telegram traffic
- With Ethernet interface (RJ45 connector). Allows for routing (Ethernet as fast backbone for KNX data, 4 connections), use as line coupler, tunneling (bus access over IP, remote maintenance via LAN)
- Integrated ACK generator
- Multi-coloured LEDs display status information
- Web frontend for status and diagnosis
- Installation on DIN rail 2 units, approx. 90 × 36 × 71 (W × H × D, mm)
- Supply: bus voltage
- Delivery with installation instructions²

N° 70149	KNX CP IP	X2	492.44 €
----------	------------------	----	-----------------

KNX RF




KNX RF-MSG-ST Motor Control Unit

- Actuator for KNX RF with 1 drive output (230 V AC)
- Motor run time variable by ETS parameters or active current metering
- Position feedback and storage, scenes
- Retransmitter function (forwarding of all received KNX RF telegrams)
- Housing with STAS3 plug and STAK3 connector
- Approx. 147 × 36 × 29 (W × H × D, mm)
- Supply: 230 V AC, 50 Hz
- Configuration with ETS, KNX RF S-Mode
- Delivery with installation instructions²

Optional Accessory:

STAK/STAS connectors p.11

N° 70711	KNX RF-MSG-ST	X2	174.79 €
----------	----------------------	----	-----------------

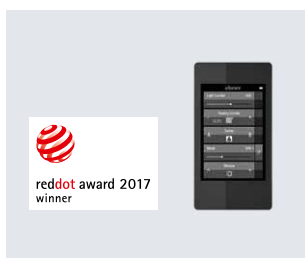

Remo KNX RF Remote Control

- Hand-held transmitter with touch control panel for KNX RF
- 32 channels
- Functions: switching, dimming, light colour RGBW, light colour temperature, moving drives (awning, blinds, roller shutters, windows), temperature change (for heating / cooling), scenes, operating media technology, value display
- Configuration with ETS, KNX RF S-Mode
- Housing plastic black, real glass
- Approx. 64 × 122 × 11 (W × H × D, mm)
- Power supply: Lithium battery, rechargeable via USB 2.0 Micro B charger
- Delivery with installation instructions²

Optional Accessory:

USB charging set, N° 10155 p. 14

N° 70747	Remo KNX RF 2.0	X2	317.65 €
----------	------------------------	----	-----------------

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

KNX TRAINING ACCESSORIES



KNX Training Kit "Basic" for KNX Training Centres

- Case with all devices required for certified KNX Basic Trainings in the KNX Training Centre
 - Lockable, telescopic handle, wheels
 - Labelling in English
- Devices:**
- Power supply and IP router
 - Multifunctional switching/shutter actuator, display LEDs
 - Dimming actuator with lamp
 - Wireless blind actuator, display LEDs
 - KNX TP/RF media coupler
 - Bus push-button for switching, dimming (relative) and drive control
 - Radio USB stick for setting up KNX RF
 - Mains cable for the case with plug type E+F (CEE 7/7) and adapters for D (BS 546, 5 A) and G (BS 1363)

N° 5107	KNX Training Kit "Basic"	X0	1600.00 €
---------	---------------------------------	----	------------------

² Manual with detailed description of the parameters can be downloaded on www.elsner-elektronik.de or ordered at cost as printed version.

ACCESSORIES

ACCESSORIES – SENSORS FOR CONNECTION TO INPUTS



T-NTC Temperature Sensor

- Temperatur plug probe for in-/outdoor applications
- Measurement range -35°C...+100°C
- Cable length approx. 3 m; Length of sensor sleeve approx. 32 mm, Ø approx. 6 mm
- For Cala Touch KNX, A/D inputs of actuators and T6-UN-B4

N° 30516	T-NTC	X1	47.56 €
----------	--------------	----	----------------



T-KTY82 Temperature Sensor

- Temperatur plug probe for in-/outdoor applications
- Cable length approx. 187 mm; Length of sensor sleeve approx. 32 mm, Ø approx. 6 mm

N° 305	T-KTY82	X1	21.43 €
--------	----------------	----	----------------

ACCESSORIES – FOR INSTALLATION



eTR Surface Mount Housing

- Cap for surface installation of devices of the eTR series (KNX, Modbus)
- Dimensions approx. 78.5 × 78.5 (W × H, mm). Mounting depth approx. 19 mm. Total depth including eTR device approx. 27.5 mm

N° 30190	eTR surface mount housing signal white RAL 9003	X2	13.95 €
----------	--	----	----------------



ST Power Plug Connector Set

- STAK3, STAS3, STASI
- STAK/STAS Connection cables see p. 11

N° 30234	ST Power Plug connector set (Article of trade)	X1	28.82 €
----------	---	----	----------------

ACCESSORIES – FOR MOUNTING OF WEATHER STATIONS



Worm Drive Hose Clips

- For pole mounting of sensors type P04/Suntracer sl (with 1 clip) and of the large hinge arm (with 2 clips)
- Diameter 40-60 mm


N° 30232	Clips for pole mounting, 2 pieces. (Article of trade)	X1	5.38 €
----------	--	----	---------------



Stainless steel mounting strap

- For pole mounting of sensors type P03/Solexa/Suntracer (with 2 mounting straps) and Vari (with 1 mounting strap)

N° 30235	Stainless steel mounting strap for pole mounting, 2 pieces (Article of trade)	X1	7.98 €
----------	--	----	---------------

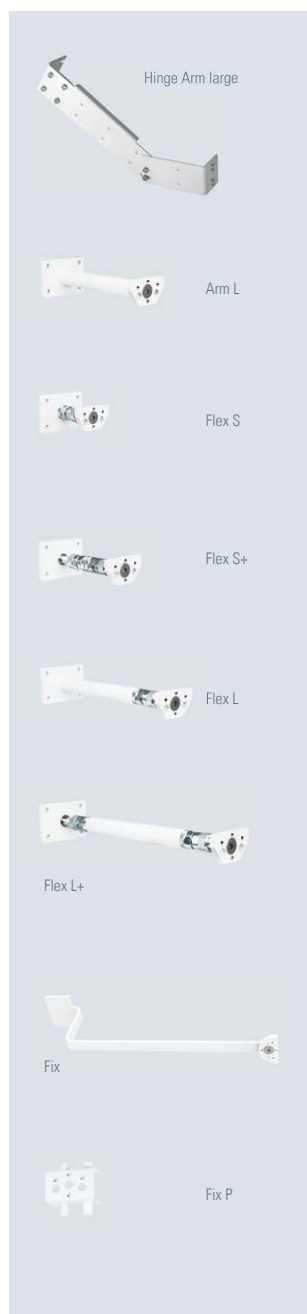

Mounting Arms/Mounts for Weather Stations

- For flexible mounting of Elsner Elektronik weather stations and sensors

Hinge Arm large:

- For wall / pole / beam mounting
- 1 hinge, total length approx. 420 mm
- Available powder-coated RAL 9016 (traffic white) or aluminium blank
- For P03 / Solexa / Suntracer models

Arm L:

- For wall mounting
- No joints, total length approx. 163 mm
- Powder-coated RAL 9003
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

Flex S:

- For wall mounting
- 1 ball joint (25°), total length approx. 64 mm
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

Flex S+:

- For wall mounting
- 2 ball joints (25° each), total length approx. 116 mm
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

Flex L:

- For wall mounting
- 1 ball joint (25°), total length approx. 215 mm
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For wall mounting
- 2 ball joints (25° each), total length approx. 267 mm
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For wall mounting
- Total length approx. 425 mm.
- Available powder-coated RAL 9003 (signal white) or aluminium blank
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For pole mounting
- Approx. 55 × 58 × 30 (W × H × D, mm)
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For wall mounting
- Approx. 55 × 58 × 30 (W × H × D, mm)
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For wall mounting
- Approx. 55 × 58 × 30 (W × H × D, mm)
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For wall mounting
- Approx. 55 × 58 × 30 (W × H × D, mm)
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

- For wall mounting
- Approx. 55 × 58 × 30 (W × H × D, mm)
- Powder-coated RAL 9003 (signal white)
- For P03/Solexa/Suntracer, P04/Suntracer sl, Windancer and Vari models

N° 30109	Hinge Arm large RAL 9016	X1	98.32 €
N° 30111	Hinge Arm large blank	X1	74.79 €
N° 30112	Arm L no joints	X1	117.65 €
N° 30119	Flex S 1 ball joint	X1	131.93 €
N° 30120	Flex S+ 2 ball joints	X1	175.10 €
N° 30115	Flex L 1 ball joint	X1	168.91 €
N° 30116	Flex L+ 2 ball joints	X1	221.01 €
N° 30127	Fix RAL 9003	X1	77.31 €
N° 30128	Fix blank	X1	65.55 €
N° 30129	Fix P RAL 9003	X1	37.31 €



ELSNER ELEKTRONIK – smart building technology

Building automation technology "Made in Ostelsheim"

Elsner Elektronik has been standing for intelligent solutions in the sector of automatic control systems and building automation since 1990. All products of Elsner are developed and manufactured at the company headquarters in Ostelsheim. Highly qualified staff and advanced technology guarantee for a continuously high quality standard.

Elsner Elektronik offers complete systems for the control of the ambient climate in buildings as well as individual components for different data interfaces (KNX, RS485, Modbus). Central operating devices, weather and indoor sensors, actuators or system devices – All products combine flexible technical solutions, comfortable operation and a forward-looking design.

elsner



Elsner Elektronik GmbH

smart building technology

Sohlegrund 16
75395 Ostelsheim
Germany

www.elsner-elektronik.de
info@elsner-elektronik.de
Tel.: +49 70 33 / 30 945-0

elsner

N° 50314 | Version 03.04.2025 | Technical modifications and errors reserved

HRB 331386 Amtsgericht Stuttgart | VAT ID n° DE 812 151 291
Managing directors: Bastian Elsner, Jutta Elsner, Lina Elsner